


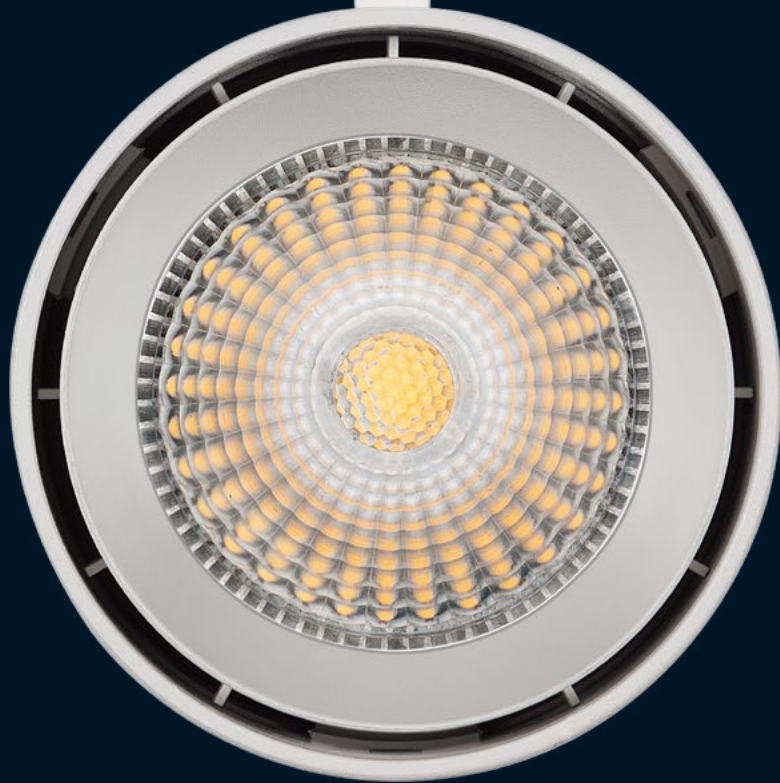

GRACION[®]

CATALOG 2018/19

GRACION LIGHTING

GRACION®

ILLUMINATE THE BEAUTY OF LIFE

ABOUT GRACION LIGHTING



SHOWROOM

GRACION LIGHTING

EN
GRACION was founded in 1991, today employs nearly 300 workers on 35,000 square meters. The headquarters are located in Guangzhou, with offices in Beijing, Hong Kong, Shanghai and starting from October 2016 also in Germany.

DE
GRACION 1991 gegründet, beschäftigt rund 300 Mitarbeitern auf 35.000 qm. Hauptsitz der Unternehmensgruppe ist Gunagzhou, Niederlassungen gibt es in Peking, Hong Kong, Shanghai und ab Oktober 2016 in Deutschland.

ES
GRACION es una empresa fundada en 1991 que cuenta con 300 empleados. Dispone de 35.000 metros cuadrados en instalaciones. El grupo líder está en Gunagzhou, teniendo oficinas también en Pekín, Hong Kong, Shanghai y desde el mes de octubre de 2016, también en Alemania.



www.gracion.com.cn

EN
From 1993 GRACION started to lead the way in the field of future lighting technology, anticipating the lighting developments.
We are dedicated to stability. GRACION offers a suitable balance between modern lighting design and economic accessibility. The lighting products and their visual experiences are designed to satisfy the customer aesthetically, functionally and economically.
GRACION provides technology in harmony with environmental awareness and social responsibility. GRACION is complying to the European directives and German standards.
We have numerous references from international brands and companies and will continue to satisfy GRACION customers.

DE
GRACION gestaltet seit 1993 die Zukunft der Lichttechnologie und antizipiert lichttechnische Entwicklungen. Wir fühlen uns der Nachhaltigkeit verpflichtet. Dazu zählt die Balance zwischen modernen Lichtdesigns und wirtschaftlicher Effizienz. GRACION produziert Leuchten und Lichterlebnisse, die die Kunden ästhetisch, funktionell und wirtschaftlich begeistern.
GRACION bietet Technik, gepaart mit Umweltbewusstsein und einer sozialen Verantwortung. GRACION fertigt nach europäischen Richtlinien und deutschen Standards.
Wir haben zahlreiche Referenzen, international bekannter Marken und Unternehmen und möchten auch Sie künftig zu glücklichen GRACION Kunden machen.

ES
GRACION diseña y representa el futuro de la tecnología y desarrollos de la iluminación desde el año 1993. Estamos comprometidos con la sostenibilidad, con ello se consigue un equilibrio perfecto entre el diseño moderno de la iluminación y la eficiencia económica. GRACION produce luminarias según las necesidades de nuestros clientes, funcional y económicamente.
GRACION ofrece las últimas novedades tecnológicas mientras estamos comprometidos con la conciencia ambiental y la responsabilidad social.
GRACION está constituida con directivas europeas y normas alemanas.
Contamos con numerosas referencias, grandes marcas conocidas a nivel internacional. Nuestra finalidad es continuar haciendo felices a nuestros clientes.

CORPORATE CULTURE



President: *Xiaoxi Wu*

和而不同，光而不耀

Unique and harmonious. Talent without ostentation

Our contemporary society lives the fast-food culture that is metaphorically eating away barriers of our historical wisdom and heritage. That is very frightening. Who remembers today slogans like "haste makes waste" or "accumulate richly and break forth vastly"? Everyone is drifting with the tide, people do not see their own reflections.

In GRACION, we are already well settled for several decades, we are free to create stylish quality products. We diligently cultivate our corporate culture. As a criterion, we constantly keep in our mind that the essence of our entire company is to lead the way forward. From generation to generation, every GRACION worker bears in mind to make products the way we live life: The aim is at Unique and harmonious. Talent without ostentation.




General Manager: *Annie Xu*

The rule directing an organization towards iterative upgrade can be called "gene". Generally, healthy and prosperous companies possess an excellent gene, which has been optimized already.

However, such rules are usually suitable only for a specific cultural / economic / business environment. Put in different context, the rules must be upgraded as genes need to be restructured or corrected.

A company at its "forming" stage has learned the rules of its iterative upgrade. In other words, it has mastered the mystery of genes. So everything about it will be running in order. But not only it is limited to keep everything in order, also it has the courage and ability to break the order at the appropriate time.

GRACION, a company at its forming stage.



Led Track Spotlight



Led Recessed Light




Led Surface mounted Light
& Pendant Light

Introduction

009-011	INDEX
012-033	LED TRACK SPOTLIGHT
034-081	LED RECESSED LIGHT
082-089	LED DOME LIGHT&DROPLIGHT
090-093	CASE
094-105	LIGHT DISTRIBUTION CURVE
106-111	BASIC KNOWLEDGE OF LIGHTING

Led Track Spotlight Series

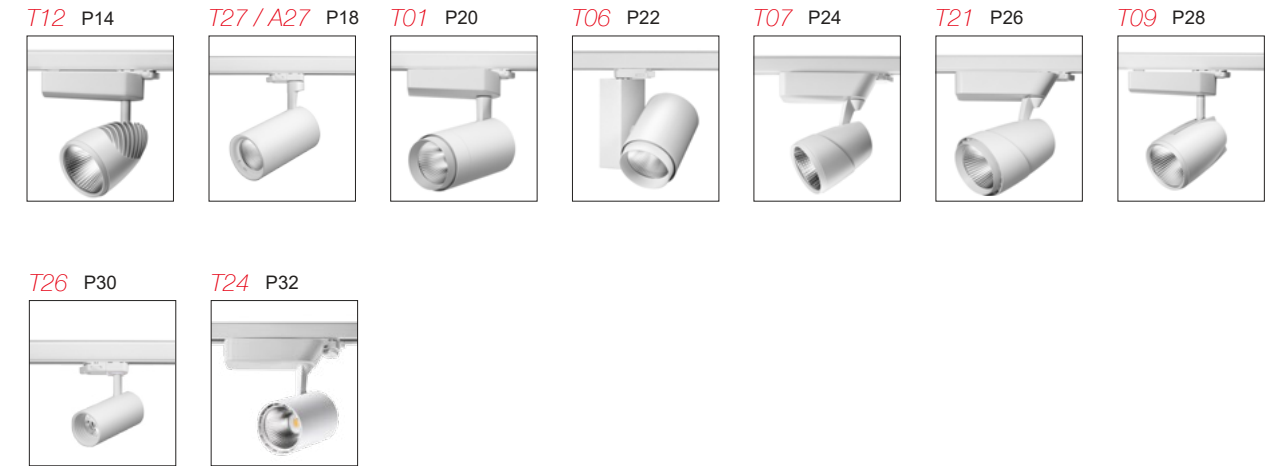


Led Recessed Light Series



PRODUCT OVERVIEW →
PRODUKT ÜBERSICHT →
DESCRIPCIÓN DEL PRODUCTO →

Led Recessed Light Series

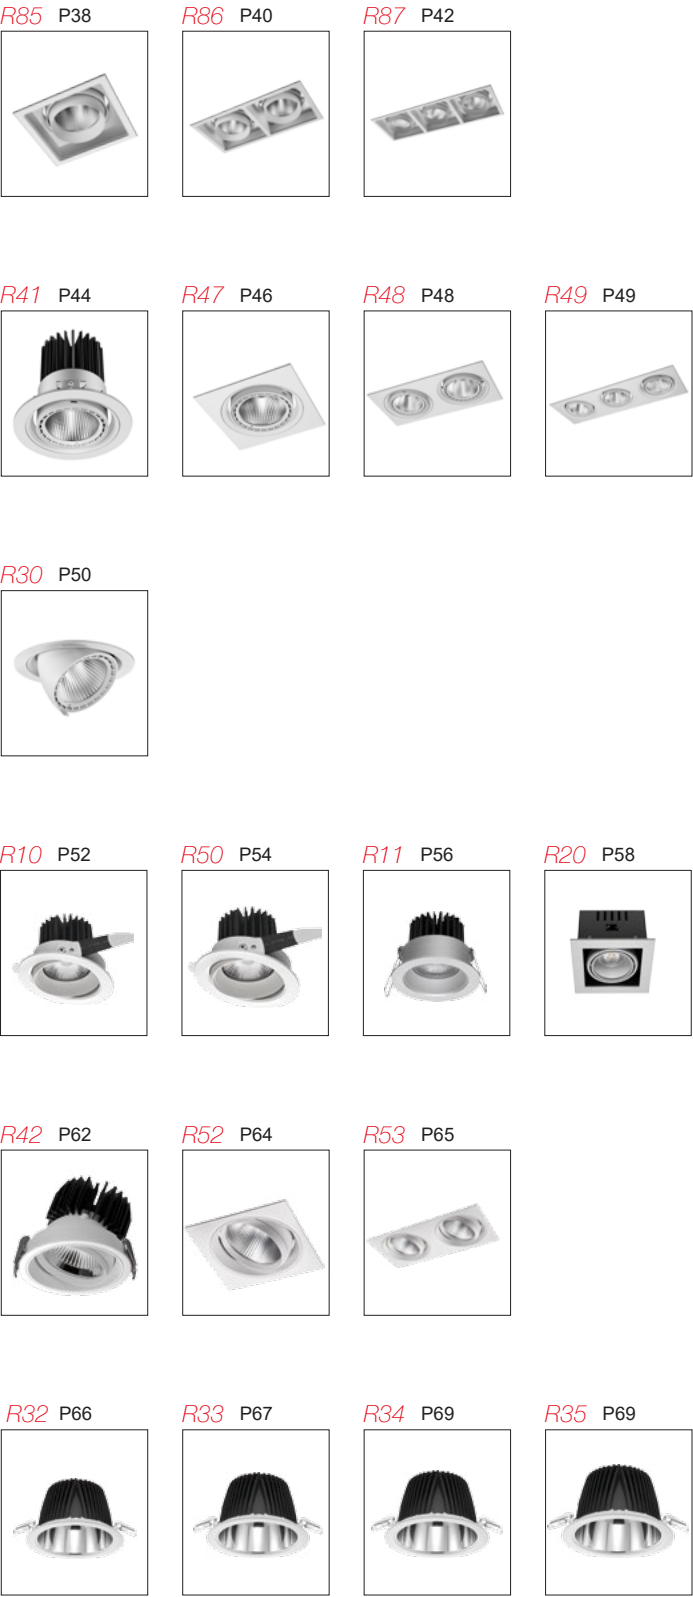

Led Recessed Light Series



Led Dome Light & Droplight Series



Case	P90	Light Distribution Curve	P94
Color Temperature	P106	Rendering Index	P107
Color Rendition	P108	Spectrum	P109
True Color And Rich Color	P110	The Different Lighting Methods	P111



Led Track Spotlight Series

EN


GRACION Track Spotlights represent innovative LED technology based on high-quality die-cast aluminum. The light heads are equipped with cooling ribs and an excellent thermal management system with a guaranteed durability of high quality of light. Various designs are available (rotatable and pivotable), depending on the desired lighting positioning, beam angle and wattages. Diverse light colors possibilities make GRACION LED Track Spotlights a versatile product with excellent design.

DE


GRACION Track Spotlights stehen für innovative LED Technik aus hochwertigem Aluminium Druckguss. Ein exzellentes Thermomanagement mit integrierten Kühlrippen im Leuchtenkorpus, garantieren eine Langlebigkeit bei gleichbleibend hoher Lichtqualität. (Basis 50.000 h). Variable Lösungen (dreh- und schwenkbar), je nach Beleuchtungssituation gewünschte Ausstrahlwinkel und Wattzahlen, sowie verschiedene Lichtfarben machen GRACION LED Track Spotlights zu einem vielseitigen Produkt mit ausgezeichnetem Design.

ES

En GRACION, aspiramos a la tecnología innovadora del LED de alta calidad. En las luminarias se han integrado nuevas formas de refrigeración para una excelente gestión térmica, garantizando así una vida útil más larga y una mayor calidad de la luz. Contamos con un amplio abanico de soluciones (rotativas y giratorias), depende de la situación de la iluminación y necesidades del ángulo del haz de luz y la potencia. La variedad de colores convierten a las luminarias de GRACION, en productos universales con un diseño excelente.



T12

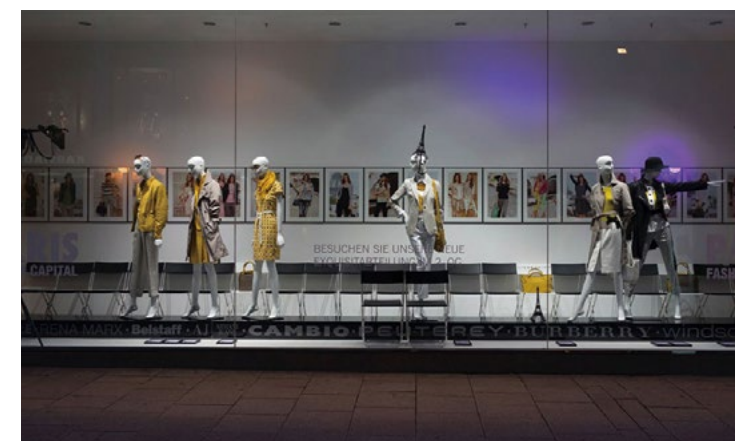




Input Voltage : 220-240V~ 50/60Hz



System watt	Lumen category	CCT	CRI (Ra)	Light Color	TM-30-15		luminous flux	Light output efficiency		
					R _f	R _g		15°	24°	36°
28W	2000 lm	3000K	95	Crisp Color	91	103	2250	88%	85%	82%
28W	3000 lm	3000K	90	True Color	92	99	2750	88%	85%	82%
36W		3000K	95	Crisp Color	91	103	2900	88%	85%	82%
28W		4000K	90	True Color	90	98	3000	88%	85%	82%
36W	4000 lm	3000K	90	True Color	92	99	3550	88%	85%	82%
36W		4000K	90	True Color	90	98	3900	88%	85%	82%

Luminous flux tolerance: ±10%
Custom order CCT : 2700K,3500K

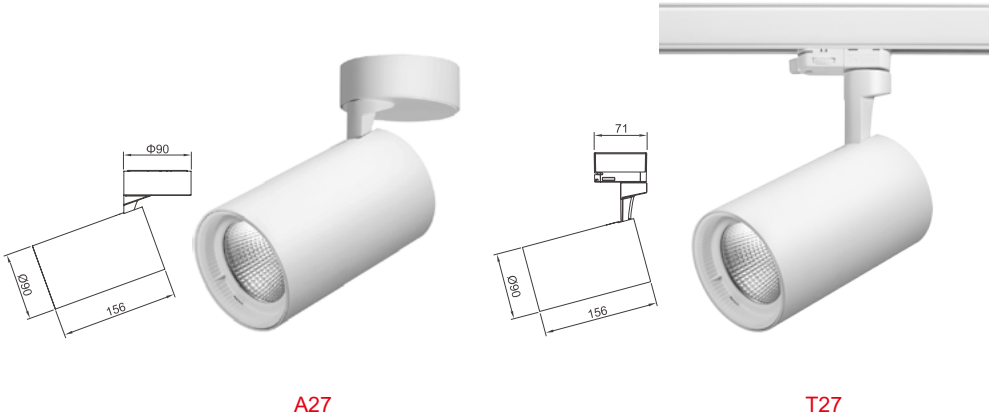


Input Voltage : 220-240V~ 50/60Hz



System watt	Lumen category	CCT	CRI (Ra)	Light Color	TM-30-15		luminous flux	Light output efficiency	
					R _f	R _g		20°	36°
28W	2000 lm	3000K	95	Crisp Color	91	103	2250	88%	87%
28W	3000 lm	3000K	90	Real Fashion Color	92	99	2650	88%	87%
28W		3000K	90	True Color	92	99	2750	88%	87%

Luminous flux tolerance: ±10%
Custom order CCT: 2700K,3500K,4000K

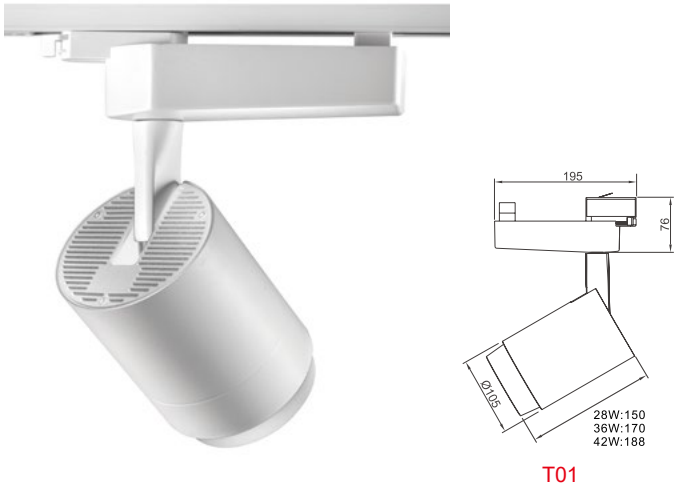


Input Voltage : 220-240V~ 50/60Hz



System watt	Lumen category	CCT	CRI (Ra)	Light Color	TM-30-15		luminous flux	Light output efficiency			
					R _f	R _g		15°	24°	36°	45°
28W	2000 lm	3000K	95	Crisp Color	91	103	2250	81%	81%	80%	78%
28W	3000 lm	3000K	90	True Color	92	99	2750	81%	81%	80%	78%
36W		3000K	95	Crisp Color	91	103	2900	81%	81%	80%	78%
28W		4000K	90	True Color	90	98	3000	81%	81%	80%	78%
42W		3000K	95	Crisp Color	91	103	3400	81%	81%	80%	78%
36W	4000 lm	3000K	90	True Color	92	99	3550	81%	81%	80%	78%
42W		3000K	90	True Color	92	99	4150	81%	81%	80%	78%
36W		4000K	90	True Color	90	98	3900	81%	81%	80%	78%
42W		4000K	90	True Color	90	98	4550	81%	81%	80%	78%
50W		4000K	80	Ordinary Color	83	95	4700	81%	81%	80%	78%
42W	Food	FM	—	Fresh Meat Color	—	—	2650	81%	81%	80%	78%
42W		FT	—	Fruit & Vegetable Color	—	—	4550	81%	81%	80%	78%
42W		B	—	Bakery Color	—	—	3950	81%	81%	80%	78%

Luminous flux tolerance: ±10%
Custom order CCT: 2700K,3500K

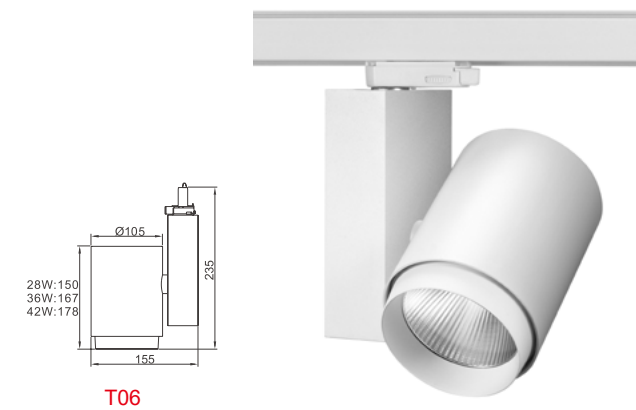


Input Voltage : 220-240V~ 50/60Hz



System watt	Lumen category	CCT	CRI (Ra)	Light Color	TM-30-15		luminous flux	Light output efficiency				
					R _f	R _g		15°	24°	36°	45°	
28W	2000 lm	3000K	95	Crisp Color	91	103	2250	81%	81%	80%	78%	
28W	3000 lm	3000K	90	True Color	92	99	2750	81%	81%	80%	78%	
36W	4000 lm	3000K	95	Crisp Color	91	103	2900	81%	81%	80%	78%	
28W		4000K	90	True Color	90	98	3000	81%	81%	80%	78%	
42W		3000K	95	Crisp Color	91	103	3400	81%	81%	80%	78%	
36W		3000K	90	True Color	92	99	3550	81%	81%	80%	78%	
42W		3000K	90	True Color	92	99	4150	81%	81%	80%	78%	
36W	4000 lm	4000K	90	True Color	90	98	3900	81%	81%	80%	78%	
42W		4000K	90	True Color	90	98	4550	81%	81%	80%	78%	
36W		4000K	80	Ordinary Color	83	95	4550	81%	81%	80%	78%	
42W		5000 lm	3000K	80	Ordinary Color	83	95	4900	81%	81%	80%	78%
36W		Food	FM	—	Fresh Meat Color	—	—	2250	81%	81%	80%	78%
36W	FT		—	Fruit & Vegetable Color	—	—	3900	81%	81%	80%	78%	
36W	B		—	Bakery Color	—	—	3400	81%	81%	80%	78%	

Luminous flux tolerance: $\pm 10\%$
Custom order CCT: 2700K, 3500K

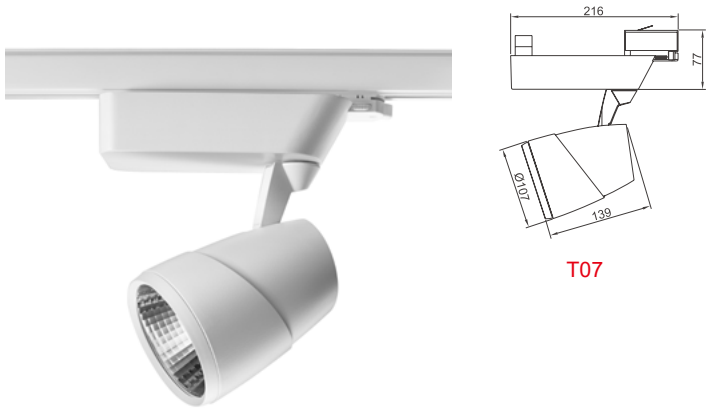

Input Voltage : 220-240V~ 50/60Hz



System watt	Lumen category	CCT	CRI (Ra)	Light Color	TM-30-15		luminous flux	Light output efficiency		
					R _f	R _g		14°	24°	36°
28W	2000 lm	3000K	95	Crisp Color	91	103	2250	91%	90%	88%
28W	3000 lm	3000K	90	True Color	92	99	2750	91%	90%	88%
36W		3000K	95	Crisp Color	91	103	2900	91%	90%	88%
28W		4000K	90	True Color	90	98	3000	91%	90%	88%
36W	4000 lm	3000K	90	True Color	92	99	3550	91%	90%	88%
36W		4000K	90	True Color	90	98	3900	91%	90%	88%
36W	Food	FM	—	Fresh Meat Color	—	—	2250	91%	90%	88%
36W		FT	—	Fruit & Vegetable Color	—	—	3900	91%	90%	88%
36W		B	—	Bakery Color	—	—	3400	91%	90%	88%

Luminous flux tolerance: ±10%
Custom order CCT: 2700K,3500K



Input Voltage : 220-240V~ 50/60Hz



System watt	Lumen category	CCT	CRI (Ra)	Light Color	TM-30-15		luminous flux	Light output efficiency		
					R _f	R _g		14°	24°	36°
42W	4000 lm	3000K	95	Crisp Color	91	103	3900	91%	90%	88%
42W		3000K	90	True Color	92	99	4150	91%	90%	88%
50W		3000K	90	True Color	92	99	4750	91%	90%	88%
42W		4000K	90	True Color	90	98	4550	91%	90%	88%
50W		4000K	90	True Color	90	98	5150	91%	90%	86%
50W		4000K	80	Ordinary Color	83	95	5300	91%	90%	86%
42W	Food	FM	—	Fresh Meat Color	—	—	2650	91%	90%	88%
42W		FT	—	Fruit & Vegetable Color	—	—	4550	91%	90%	88%
42W		B	—	Bakery Color	—	—	3950	91%	90%	88%

Luminous flux tolerance: ±10%
Custom order CCT: 2700K,3500K






Input Voltage : 220-240V~ 50/60Hz



System watt	Lumen category	CCT	CRI (Ra)	Light Color	TM-30-15		luminous flux	Light output efficiency		
					R _f	R _g		14°	24°	36°
28W	2000 lm	3000K	95	Crisp Color	91	103	2250	91%	90%	88%
28W	3000 lm	3000K	90	True Color	92	99	2750	91%	90%	88%
36W		3000K	95	Crisp Color	91	103	2900	91%	90%	88%
42W		3000K	95	Crisp Color	91	103	3400	91%	90%	88%
28W		4000K	90	True Color	90	98	3000	91%	90%	88%
36W	4000 lm	3000K	90	True Color	92	99	3550	91%	90%	88%
42W		3000K	90	True Color	92	99	4150	91%	90%	88%
36W		4000K	90	True Color	90	98	3900	91%	90%	88%
42W		4000K	90	True Color	90	98	4550	91%	90%	88%

Luminous flux tolerance: ±10%
Custom order CCT: 2700K,3500K



T26

Input Voltage : 220-240V~ 50/60Hz



System watt	Lumen category	CCT	CRI (Ra)	Light Color	TM-30-15		luminous flux	Light output efficiency	
					R _f	R _g		15°	24°
8W	1000 lm	3000K	80	Ordinary Color	83	95	950	88%	85%
8W		4000K	80	Ordinary Color	83	95	1000	88%	85%

Luminous flux tolerance: ±10%
Custom order CCT: 2700K,3500K



Input Voltage : 220-240V~ 50/60Hz



System watt	Lumen category	CCT	CRI (Ra)	Light Color	TM-30-15		luminous flux	Light output efficiency			
					R _f	R _g		15°	24°	36°	45°
28W	2000 lm	3000K	95	Crisp Color	91	103	2250	91%	91%	90%	88%
28W	3000 lm	3000K	90	True Color	92	99	2750	91%	91%	90%	88%
36W		3000K	95	Crisp Color	91	103	2900	91%	91%	90%	88%
28W		4000K	90	True Color	90	98	3000	91%	91%	90%	88%
36W	4000 lm	3000K	90	True Color	92	99	3550	91%	91%	90%	88%
36W		4000K	90	True Color	90	98	3900	91%	91%	90%	88%
36W	Food	FM	—	Fresh Meat Color	—	—	2250	91%	91%	90%	88%
36W		FT	—	Fruit & Vegetable Color	—	—	3900	91%	91%	90%	88%
36W		B	—	Bakery Color	—	—	3400	91%	91%	90%	88%

Luminous flux tolerance: ±10%
Custom order CCT: 2700K,3500K



Led Recessed Light Series

EN

Design meets function

GRACION Downlights and Semi-recessed lamps are also part of the innovative LED technology with a GRACION thermal management system. This system guarantees a long service life with high quality of light. With the addition of GRACION designed reflector technology, the products not only achieve a high efficiency, but also enable their usage in various areas.

DE


Design trifft Funktion

GRACION Einbauleuchten und Halbeinbauleuchten stehen ebenso für innovative LED Technik mit einem von GRACION entwickelten Thermomanagement. Das garantiert eine lange Lebensdauer bei hoher Lichtqualität. Mit einer von GRACION designten Reflektortechnik erreichen Sie höchst effiziente Wirkungsgrade. Das GRACION Design ermöglicht den Einsatz in vielen Bereichen.

ES

Todos los diseños cumplen su función.

Las luminarias y lámparas semiempotradas de GRACION también representan la innovación tecnológica del LED, con una gestión térmica desarrollada por GRACION. Esto garantiza una larga vida útil con la más alta calidad de la luz gracias a la tecnología de reflectores diseñada por GRACION para conseguir una eficiencia altamente efectiva. El diseño de GRACION permite su uso en diferentes áreas.





Led Recessed Light GRACION LIGHTING

Input Voltage : 220-240V~ 50/60Hz



System watt	Lumen category	CCT	CRI (Ra)	Light Color	TM-30-15		luminous flux	Light output efficiency			
					R _f	R _g		15°	24°	36°	45°
28W	2000 lm	3000K	95	Crisp Color	91	103	2250	81%	81%	80%	78%
28W	3000 lm	3000K	90	True Color	92	99	2750	81%	81%	80%	78%
36W		3000K	95	Crisp Color	91	103	2900	81%	81%	80%	78%
42W		3000K	95	Crisp Color	91	103	3400	81%	81%	80%	78%
28W		4000K	90	True Color	90	98	3000	81%	81%	80%	78%
36W	4000 lm	3000K	90	True Color	92	99	3550	81%	81%	80%	78%
42W		3000K	90	True Color	92	99	4150	81%	81%	80%	78%
36W		4000K	90	True Color	90	98	3900	81%	81%	80%	78%
42W		4000K	90	True Color	90	98	4550	81%	81%	80%	78%
42W	Food	FM	—	Fresh Meat Color	—	—	2650	81%	81%	80%	78%
42W		FT	—	Fruit & Vegetable Color	—	—	4550	81%	81%	80%	78%
42W		B	—	Bakery Color	—	—	3950	81%	81%	80%	78%

Luminous flux tolerance: ±10%
Custom order CCT: 2700K,3500K

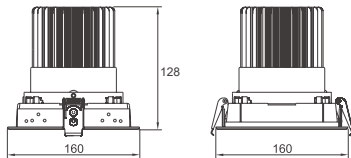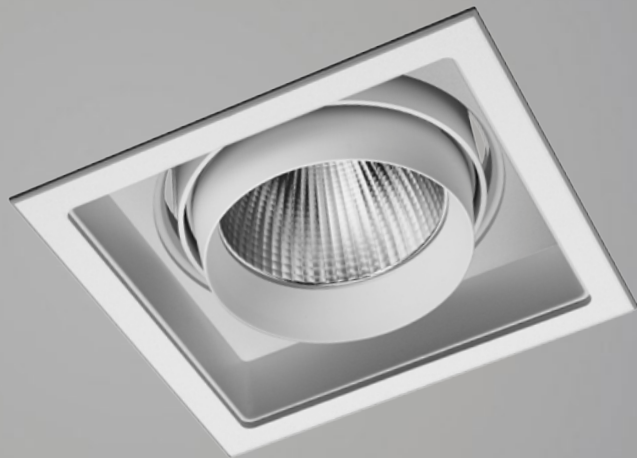


R85 150x150

Input Voltage : 220-240V~ 50/60Hz



System watt	Lumen category	CCT	CRI (Ra)	Light Color	TM-30-15		luminous flux	Light output efficiency			
					R _f	R _g		15°	24°	36°	45°
28W	2000 lm	3000K	95	Crisp Color	91	103	2250	81%	81%	80%	78%
28W	3000 lm	3000K	90	True Color	92	99	2750	81%	81%	80%	78%
36W		3000K	95	Crisp Color	91	103	2900	81%	81%	80%	78%
42W		3000K	95	Crisp Color	91	103	3400	81%	81%	80%	78%
28W		4000K	90	True Color	90	98	3000	81%	81%	80%	78%
36W	4000 lm	3000K	90	True Color	92	99	3550	81%	81%	80%	78%
42W		3000K	90	True Color	92	99	4150	81%	81%	80%	78%
36W		4000K	90	True Color	90	98	3900	81%	81%	80%	78%
42W		4000K	90	True Color	90	98	4550	81%	81%	80%	78%

Luminous flux tolerance: ±10%
Custom order CCT: 2700K,3500K

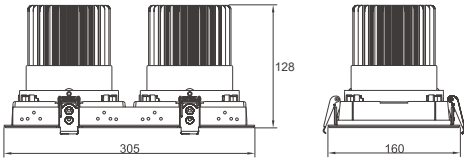



R86 295x150

Input Voltage : 220-240V~ 50/60Hz



System watt	Lumen category	CCT	CRI (Ra)	Light Color	TM-30-15		luminous flux	Light output efficiency			
					R _f	R _g		15°	24°	36°	45°
2x28W	5000 lm	3000K	95	Crisp Color	91	103	4550	81%	81%	80%	78%
2x28W	6000 lm	3000K	90	True Color	92	99	5550	81%	81%	80%	78%
2x36W		3000K	95	Crisp Color	91	103	5850	81%	81%	80%	78%
2x28W		4000K	90	True Color	90	98	6050	81%	81%	80%	78%
2x42W	8000 lm	3000K	95	Crisp Color	91	103	6800	81%	81%	80%	78%
2x36W		3000K	90	True Color	92	99	7100	81%	81%	80%	78%
2x42W		3000K	90	True Color	92	99	8300	81%	81%	80%	78%
2x36W		4000K	90	True Color	90	98	7800	81%	81%	80%	78%
2x42W	10000 lm	4000K	90	True Color	90	98	9050	81%	81%	80%	78%

Luminous flux tolerance: ±10%
Custom order CCT: 2700K,3500K

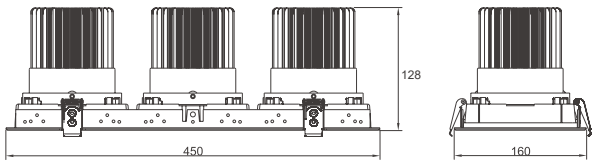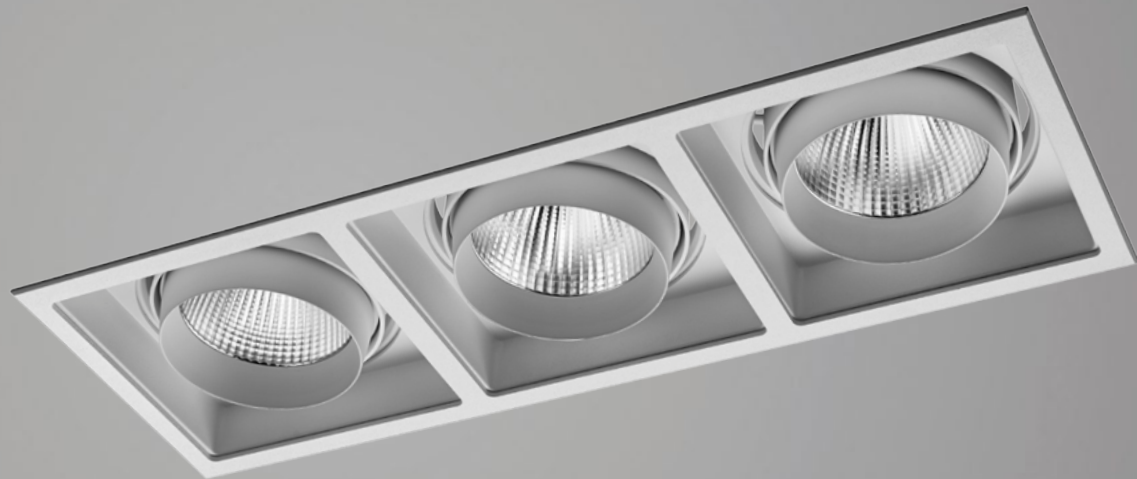


R87 440x150

Input Voltage : 220-240V~ 50/60Hz



System watt	Lumen category	CCT	CRI (Ra)	Light Color	TM-30-15		luminous flux	Light output efficiency			
					R _f	R _g		15°	24°	36°	45°
3x28W	8000 lm	3000K	95	Crisp Color	91	103	6800	78%	81%	78%	78%
3x28W		3000K	90	True Color	92	99	8300	78%	81%	78%	78%
3x36W		3000K	95	Crisp Color	91	103	8750	78%	81%	78%	78%
3x42W	10000 lm	3000K	95	Crisp Color	91	103	10200	78%	81%	78%	78%
3x36W		3000K	90	True Color	92	99	10700	78%	81%	78%	78%
3x28W		4000K	90	True Color	90	98	9050	78%	81%	78%	78%
3x42W	12000 lm	3000K	90	True Color	92	99	12450	78%	81%	78%	78%
3x36W		4000K	90	True Color	90	98	11650	78%	81%	78%	78%
3x42W		4000K	90	True Color	90	98	13600	78%	81%	78%	78%

Luminous flux tolerance: ±10%
Custom order CCT: 2700K,3500K

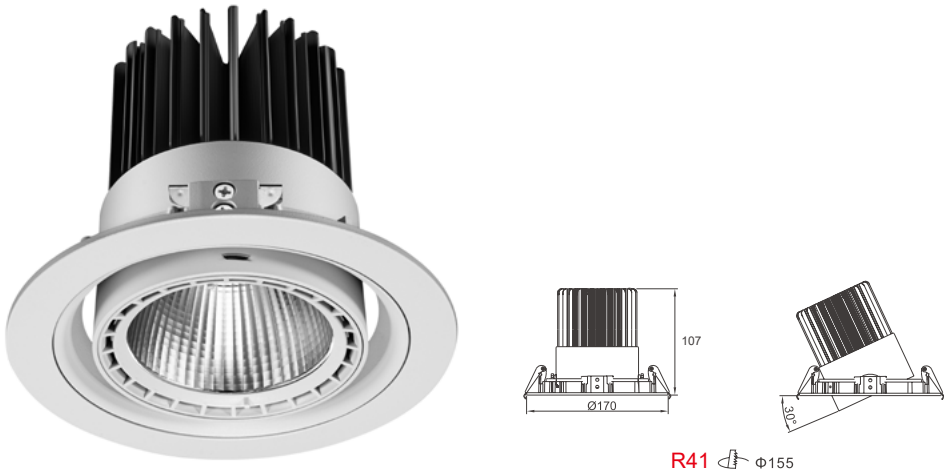


Input Voltage : 220-240V~ 50/60Hz



System watt	Lumen category	CCT	CRI (Ra)	Light Color	TM-30-15		luminous flux	Light output efficiency			
					R _f	R _g		15°	24°	36°	45°
28W	2000 lm	3000K	95	Crisp Color	91	103	2250	81%	81%	80%	78%
28W	3000 lm	3000K	90	True Color	92	99	2750	81%	81%	80%	78%
36W		3000K	95	Crisp Color	91	103	2900	81%	81%	80%	78%
42W		3000K	95	Crisp Color	91	103	3400	81%	81%	80%	78%
28W		4000K	90	True Color	90	98	3000	81%	81%	80%	78%
36W	4000 lm	3000K	90	True Color	92	99	3550	81%	81%	80%	78%
42W		3000K	90	True Color	92	99	4150	81%	81%	80%	78%
36W		4000K	90	True Color	90	98	3900	81%	81%	80%	78%
42W		4000K	90	True Color	90	98	4550	81%	81%	80%	78%

Luminous flux tolerance: ±10%
Custom order CCT: 2700K,3500K

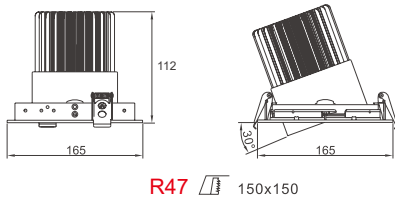


Input Voltage : 220-240V~ 50/60Hz



System watt	Lumen category	CCT	CRI (Ra)	Light Color	TM-30-15		luminous flux	Light output efficiency			
					R _f	R _g		15°	24°	36°	45°
28W	2000 lm	3000K	95	Crisp Color	91	103	2250	81%	81%	80%	78%
28W	3000 lm	3000K	90	True Color	92	99	2750	81%	81%	80%	78%
36W		3000K	95	Crisp Color	91	103	2900	81%	81%	80%	78%
42W		3000K	95	Crisp Color	91	103	3400	81%	81%	80%	78%
28W		4000K	90	True Color	90	98	3000	81%	81%	80%	78%
36W	4000 lm	3000K	90	True Color	92	99	3550	81%	81%	80%	78%
42W		3000K	90	True Color	92	99	4150	81%	81%	80%	78%
36W		4000K	90	True Color	90	98	3900	81%	81%	80%	78%
42W		4000K	90	True Color	90	98	4550	81%	81%	80%	78%

Luminous flux tolerance: ±10%
Custom order CCT : 2700K,3500K

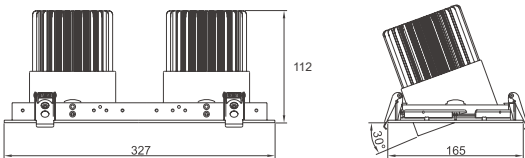


R48 305x150

Input Voltage : 220-240V~ 50/60Hz



System watt	Lumen category	CCT	CRI (Ra)	Light Color	TM-30-15		luminous flux	Light output efficiency			
					R _f	R _g		15°	24°	36°	45°
2x28W	5000 lm	3000K	95	Crisp Color	91	103	4550	81%	81%	80%	78%
2x28W	6000 lm	3000K	90	True Color	92	99	5550	81%	81%	80%	78%
2x36W	8000 lm	3000K	95	Crisp Color	91	103	5850	81%	81%	80%	78%
2x28W		4000K	90	True Color	90	98	6050	81%	81%	80%	78%
2x42W		3000K	95	Crisp Color	91	103	6800	81%	81%	80%	78%
2x36W	10000 lm	3000K	90	True Color	92	99	7100	81%	81%	80%	78%
2x42W		3000K	90	True Color	92	99	8300	81%	81%	80%	78%
2x36W		4000K	90	True Color	90	98	7800	81%	81%	80%	78%
2x42W		4000K	90	True Color	90	98	9050	81%	81%	80%	78%

Luminous flux tolerance: ±10%
Custom order CCT : 2700K,3500K

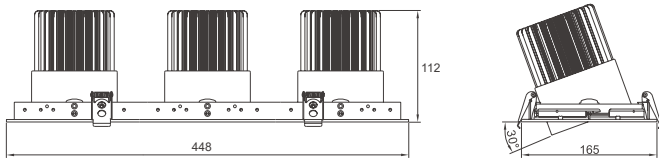


R49 468x150

Input Voltage : 220-240V~ 50/60Hz



System watt	Lumen category	CCT	CRI (Ra)	Light Color	TM-30-15		luminous flux	Light output efficiency			
					R _f	R _g		15°	24°	36°	45°
3x28W	8000 lm	3000K	95	Crisp Color	91	103	6800	78%	81%	78%	78%
3x28W	10000 lm	3000K	90	True Color	92	99	8300	78%	81%	78%	78%
3x36W		3000K	95	Crisp Color	91	103	8750	78%	81%	78%	78%
3x42W		3000K	95	Crisp Color	91	103	10200	78%	81%	78%	78%
3x36W	12000 lm	3000K	90	True Color	92	99	10700	78%	81%	78%	78%
3x28W		4000K	90	True Color	90	98	9050	78%	81%	78%	78%
3x42W		3000K	90	True Color	92	99	12450	78%	81%	78%	78%
3x36W	13600	4000K	90	True Color	90	98	11650	78%	81%	78%	78%
3x42W		4000K	90	True Color	90	98	13600	78%	81%	78%	78%

Luminous flux tolerance: ±10%
Custom order CCT : 2700K,3500K

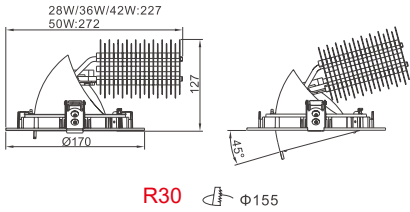

Input Voltage: 220-240V~ 50/60Hz




System watt	Lumen category	CCT	CRI (Ra)	Light Color	TM-30-15		luminous flux	Light output efficiency			
					R _f	R _g		15°	24°	36°	45°
28W	2000 lm	3000K	95	Crisp Color	91	103	2250	91%	91%	90%	88%
28W	3000 lm	3000K	90	True Color	92	99	2750	91%	91%	90%	88%
36W		3000K	95	Crisp Color	91	103	2900	91%	91%	90%	88%
42W		3000K	95	Crisp Color	91	103	3400	91%	91%	90%	88%
28W		4000K	90	True Color	90	98	3000	91%	91%	90%	88%
36W	4000 lm	3000K	90	True Color	92	99	3550	91%	91%	90%	88%
42W		3000K	90	True Color	92	99	4150	91%	91%	90%	88%
36W		4000K	90	True Color	90	98	3900	91%	91%	90%	88%
50W	5000 lm	3000K	90	True Color	92	99	4750	91%	91%	90%	88%
42W		3000K	80	Ordinary Color	83	95	4900	91%	91%	90%	88%
42W		4000K	90	True Color	90	98	4550	91%	91%	90%	88%
50W		4000K	90	True Color	90	98	5200	91%	91%	90%	88%
42W		4000K	80	Ordinary Color	83	95	5300	91%	91%	90%	88%
42W	Food	FM	—	True Color	—	—	2650	91%	91%	90%	88%
42W		FT	—	Fresh Meat Color	—	—	4550	91%	91%	90%	88%
42W		B	—	Fruit & Vegetable Color	—	—	3950	91%	91%	90%	88%

Luminous flux tolerance: ±10%
Custom order CCT : 2700K,3500K




Input Voltage : 220-240V~ 50/60Hz




System watt	Lumen category	CCT	CRI (Ra)	Light Color	TM-30-15		luminous flux	Light output efficiency	
					R _f	R _g		24°	36°
6W	1000 lm	3000K	80	Ordinary Color	83	95	700	75%	75%
6W		4000K	80	Ordinary Color	83	95	750	75%	75%
8W		3000K	80	Ordinary Color	83	95	950	75%	75%
8W		4000K	80	Ordinary Color	83	95	1000	75%	75%

Luminous flux tolerance: ±10%
Custom order CCT : 2700K,3500K



R50  $\Phi 75$


Input Voltage : 220-240V~ 50/60Hz



System watt	Lumen category	CCT	CRI (Ra)	Light Color	TM-30-15		luminous flux	Light output efficiency	
					R _f	R _g		24°	36°
6W	1000 lm	3000K	80	Ordinary Color	83	95	700	75%	75%
6W		4000K	80	Ordinary Color	83	95	750	75%	75%
8W		3000K	80	Ordinary Color	83	95	950	75%	75%
8W		4000K	80	Ordinary Color	83	95	1000	75%	75%

Luminous flux tolerance: ±10%
Custom order CCT : 2700K,3500K






Input Voltage : 220-240V~ 50/60Hz



System watt	Lumen category	CCT	CRI (Ra)	Light Color	TM-30-15		luminous flux	Light output efficiency	
					R _f	R _g		24°	36°
6W	1000 lm	3000K	80	Ordinary Color	83	95	700	75%	75%
6W		4000K	80	Ordinary Color	83	95	750	75%	75%
8W		3000K	80	Ordinary Color	83	95	950	75%	75%
8W		4000K	80	Ordinary Color	83	95	1000	75%	75%

Luminous flux tolerance: ±10%
Custom order CCT : 2700K,3500K






Input Voltage : 220-240V~ 50/60Hz




System watt	Lumen category	CCT	CRI (Ra)	Light Color	TM-30-15		luminous flux	Light output efficiency	
					R _f	R _g		24°	36°
6W	1000 lm	3000K	80	Ordinary Color	83	95	700	75%	75%
6W		4000K	80	Ordinary Color	83	95	750	75%	75%
8W		3000K	80	Ordinary Color	83	95	950	75%	75%
8W		4000K	80	Ordinary Color	83	95	1000	75%	75%

Luminous flux tolerance: ±10%
Custom order CCT : 2700K,3500K




Input Voltage : 220-240V~ 50/60Hz




System watt	Lumen category	CCT	CRI (Ra)	Light Color	TM-30-15		luminous flux	Light output efficiency	
					R _f	R _g		24°	36°
2x6W	1000 lm	3000K	80	Ordinary Color	83	95	1400	75%	75%
2x6W		4000K	80	Ordinary Color	83	95	1500	75%	75%
2x8W	2000 lm	3000K	80	Ordinary Color	83	95	1900	75%	75%
2x8W		4000K	80	Ordinary Color	83	95	2000	75%	75%

Luminous flux tolerance: ±10%
Custom order CCT : 2700K,3500K




Input Voltage : 220-240V~ 50/60Hz



System watt	Lumen category	CCT	CRI (Ra)	Light Color	TM-30-15		luminous flux	Light output efficiency	
					R _f	R _g		24°	36°
3x6W	2000 lm	3000K	80	Ordinary Color	83	95	2100	75%	75%
3x6W		4000K	80	Ordinary Color	83	95	2250	75%	75%
3x8W	3000 lm	3000K	80	Ordinary Color	83	95	2850	75%	75%
3x8W		4000K	80	Ordinary Color	83	95	3000	75%	75%

Luminous flux tolerance: ±10%
Custom order CCT : 2700K,3500K

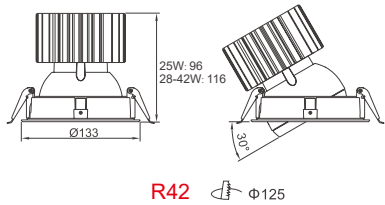


Led Recessed Light GRACION LIGHTING

Input Voltage : 220-240V~ 50/60Hz



System watt	Lumen category	CCT	CRI (Ra)	Light Color	TM-30-15		luminous flux	Light output efficiency			
					R _f	R _g		15°	24°	36°	45°
28W	2000 lm	3000K	95	Crisp Color	91	103	2250	91%	91%	90%	88%
28W	3000 lm	3000K	90	True Color	92	99	2750	91%	91%	90%	88%
36W		3000K	95	Crisp Color	91	103	2900	91%	91%	90%	88%
28W		3000K	80	Ordinary Color	83	95	3300	91%	91%	90%	88%
28W		4000K	90	True Color	90	98	3000	91%	91%	90%	88%
36W	4000 lm	3000K	90	True Color	92	99	3550	91%	91%	90%	88%
28W		4000K	80	Ordinary Color	83	95	3500	91%	91%	90%	88%
36W		4000K	90	True Color	90	98	3900	91%	91%	90%	88%

Luminous flux tolerance: ±10%
Custom order CCT : 2700K,3500K




R52 Φ125

Input Voltage : 220-240V~ 50/60Hz



System watt	Lumen category	CCT	CRI (Ra)	Light Color	TM-30-15		luminous flux	Light output efficiency			
					R _f	R _g		15°	24°	36°	45°
28W	2000 lm	3000K	95	Crisp Color	91	103	2250	91%	91%	90%	88%
28W	3000 lm	3000K	90	True Color	92	99	2750	91%	91%	90%	88%
36W		3000K	95	Crisp Color	91	103	2900	91%	91%	90%	88%
28W		3000K	80	Ordinary Color	83	95	3300	91%	91%	90%	88%
28W		4000K	90	True Color	90	98	3000	91%	91%	90%	88%
36W	4000 lm	3000K	90	True Color	92	99	3550	91%	91%	90%	88%
28W		4000K	80	Ordinary Color	83	95	3500	91%	91%	90%	88%
36W		4000K	90	True Color	90	98	3900	91%	91%	90%	88%

Luminous flux tolerance: ±10%
Custom order CCT : 2700K,3500K

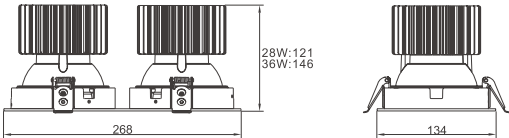


R53 255x125

Input Voltage : 220-240V~ 50/60Hz



System watt	Lumen category	CCT	CRI (Ra)	Light Color	TM-30-15		luminous flux	Light output efficiency			
					R _f	R _g		15°	24°	36°	45°
2x28W	5000 lm	3000K	95	Crisp Color	91	103	4500	91%	91%	90%	88%
2x28W	6000 lm	3000K	90	True Color	92	99	5500	91%	91%	90%	88%
2x36W		3000K	95	Crisp Color	91	103	5800	91%	91%	90%	88%
2x28W		3000K	80	Ordinary Color	83	95	6600	91%	91%	90%	88%
2x28W		4000K	90	True Color	90	98	6000	91%	91%	90%	88%
2x36W	8000 lm	3000K	90	True Color	92	99	7100	91%	91%	90%	88%
2x28W		4000K	80	Ordinary Color	83	95	7000	91%	91%	90%	88%
2x36W		4000K	90	True Color	90	98	7800	91%	91%	90%	88%

Luminous flux tolerance: ±10%
Custom order CCT : 2700K,3500K




R32  Ø125

Input Voltage : 220-240V~ 50/60Hz



System watt	Lumen category	CCT	CRI (Ra)	Light Color	TM-30-15		luminous flux	Light output efficiency
					R _f	R _g		65°
8W	1000 lm	3000K	80	Ordinary Color	—	—	900	82%
8W		4000K	80	Ordinary Color	—	—	950	82%
10W		3000K	80	Ordinary Color	—	—	1050	82%
10W		4000K	80	Ordinary Color	—	—	1100	82%

Luminous flux tolerance: ±10%
Custom order CCT : 2700K,3500K



R33  Ø150


Input Voltage: 220-240V~ 50/60Hz



System watt	Lumen category	CCT	CRI (Ra)	Light Color	TM-30-15		luminous flux	Light output efficiency
					R _f	R _g		65°
10W	1000 lm	3000K	80	Ordinary Color	—	—	1050	82%
10W		4000K	80	Ordinary Color	—	—	1100	82%
14W	2000 lm	3000K	80	Ordinary Color	—	—	1600	82%
14W		4000K	80	Ordinary Color	—	—	1750	82%

Luminous flux tolerance: ±10%
Custom order CCT : 2700K,3500K






R34  Ø175

Input Voltage : 220-240V~ 50/60Hz



System watt	Lumen category	CCT	CRI (Ra)	Light Color	TM-30-15		luminous flux	Light output efficiency
					R _f	R _g		65°
14W	2000 lm	3000K	80	Ordinary Color	—	—	1600	82%
14W		4000K	80	Ordinary Color	—	—	1750	82%
20W		3000K	80	Ordinary Color	—	—	2350	82%
20W	3000 lm	4000K	80	Ordinary Color	—	—	2500	82%
30W	4000 lm	3000K	80	Ordinary Color	—	—	3550	82%
30W		4000K	80	Ordinary Color	—	—	3800	82%

Luminous flux tolerance: ±10%
Custom order CCT : 2700K,3500K




R35  Ø205

Input Voltage : 220-240V~ 50/60Hz



System watt	Lumen category	CCT	CRI (Ra)	Light Color	TM-30-15		luminous flux	Light output efficiency
					R _f	R _g		65°
26W	3000 lm	3000K	80	Ordinary Color	—	—	3250	82%
26W		4000K	80	Ordinary Color	—	—	3450	82%
40W	5000 lm	3000K	80	Ordinary Color	—	—	4900	82%
40W		4000K	80	Ordinary Color	—	—	5250	82%

Luminous flux tolerance: ±10%
Custom order CCT : 2700K,3500K




R82 Φ150

Input Voltage : 220-240V~ 50/60Hz



System watt	Lumen category	CCT	CRI (Ra)	Light Color	TM-30-15 R _f	TM-30-15 R _g	luminous flux	Light output efficiency 65°
30W	4000 lm	3000K	80	Ordinary Color	—	—	3800	82%
30W		4000K	80	Ordinary Color	—	—	4100	82%
40W	5000 lm	3000K	80	Ordinary Color	—	—	4900	82%
40W		4000K	80	Ordinary Color	—	—	5250	82%

Luminous flux tolerance: ±10%
Custom order CCT : 2700K,3500K



R83 Φ125

Input Voltage: 220-240V~ 50/60Hz



System watt	Lumen category	CCT	CRI (Ra)	Light Color	TM-30-15 R _f	TM-30-15 R _g	luminous flux	Light output efficiency 65°
26W	3000 lm	3000K	80	Ordinary Color	—	—	3250	82%
26W		4000K	80	Ordinary Color	—	—	3450	82%
40W	5000 lm	3000K	80	Ordinary Color	—	—	4900	82%
40W		4000K	80	Ordinary Color	—	—	5250	82%

Luminous flux tolerance: ±10%
Custom order CCT : 2700K,3500K




Input Voltage : 220-240V~ 50/60Hz



System watt	Lumen category	CCT	CRI (Ra)	Light Color	TM-30-15		luminous flux	Light output efficiency			
					R _f	R _g		15°	24°	36°	45°
28W	2000 lm	3000K	95	Crisp Color	91	103	2250	91%	91%	90%	88%
28W	3000 lm	3000K	90	True Color	92	99	2750	91%	91%	90%	88%
36W		3000K	95	Crisp Color	91	103	2900	91%	91%	90%	88%
28W		4000K	90	True Color	90	98	3000	91%	91%	90%	88%
36W	4000 lm	3000K	90	True Color	92	99	3550	91%	91%	90%	88%
36W		4000K	90	True Color	90	98	3900	91%	91%	90%	88%
36W	Food	FM	—	Fresh Meat Color	—	—	2250	91%	91%	90%	88%
36W		FT	—	Fruit & Vegetable Color	—	—	3900	91%	91%	90%	88%
36W		B	—	Bakery Color	—	—	3400	91%	91%	90%	88%

Luminous flux tolerance: ±10%
Custom order CCT : 2700K,3500K

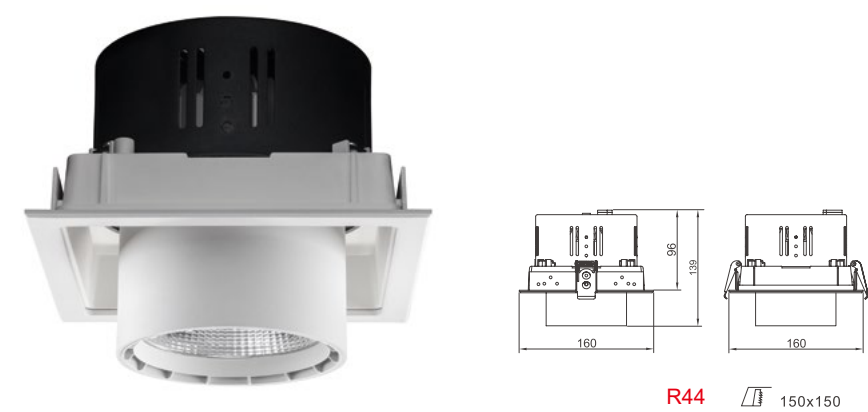


Input Voltage : 220-240V~ 50/60Hz



System watt	Lumen category	CCT	CRI (Ra)	Light Color	TM-30-15		luminous flux	Light output efficiency			
					R _f	R _g		15°	24°	36°	45°
28W	2000 lm	3000K	95	Crisp Color	91	103	2250	91%	91%	90%	88%
28W	3000 lm	3000K	90	True Color	92	99	2750	91%	91%	90%	88%
36W		3000K	95	Crisp Color	91	103	2900	91%	91%	90%	88%
28W		4000K	90	True Color	90	98	3000	91%	91%	90%	88%
36W	4000 lm	3000K	90	True Color	92	99	3550	91%	91%	90%	88%
36W		4000K	90	True Color	90	98	3900	91%	91%	90%	88%
36W	Food	FM	—	Fresh Meat Color	—	—	2250	91%	91%	90%	88%
36W		FT	—	Fruit & Vegetable Color	—	—	3900	91%	91%	90%	88%
36W		B	—	Bakery Color	—	—	3400	91%	91%	90%	88%

Luminous flux tolerance: ±10%
Custom order CCT : 2700K,3500K

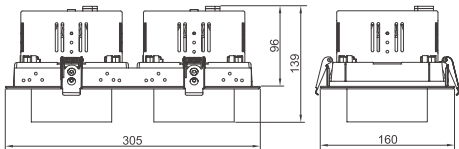


R45 295x150

Input Voltage : 220-240V~ 50/60Hz



System watt	Lumen category	CCT	CRI (Ra)	Light Color	TM-30-15		luminous flux	Light output efficiency			
					R _f	R _g		15°	24°	36°	45°
2x28	5000lm	3000K	95	Crisp Color	91	103	4550	91%	91%	90%	88%
2x28		3000K	90	True Color	92	99	5550	91%	91%	90%	88%
2x36	6000lm	3000K	95	Crisp Color	91	103	5850	91%	91%	90%	88%
2x28		4000K	90	True Color	90	98	6050	91%	91%	90%	88%
2x36	8000lm	3000K	90	True Color	92	99	7150	91%	91%	90%	88%
2x36		4000K	90	True Color	90	98	7800	91%	91%	90%	88%

Luminous flux tolerance: ±10%
Custom order CCT : 2700K,3500K

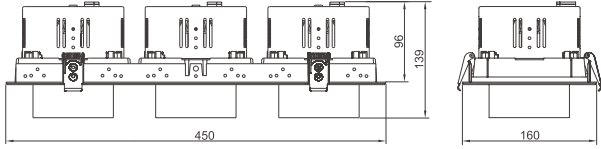


R46 440x150

Input Voltage : 220-240V~ 50/60Hz




System watt	Lumen category	CCT	CRI (Ra)	Light Color	TM-30-15		luminous flux	Light output efficiency			
					R _f	R _g		15°	24°	36°	45°
3x28	6000lm	3000K	95	Crisp Color	91	103	6800	91%	91%	90%	88%
3x28	8000 lm	3000K	90	True Color	92	99	8300	91%	91%	90%	88%
3x36		3000K	95	Crisp Color	91	103	8750	91%	91%	90%	88%
3x28	10000 lm	4000K	90	True Color	90	98	9050	91%	91%	90%	88%
3x36		3000K	90	True Color	92	99	10700	91%	91%	90%	88%
3x36	12000 lm	4000K	90	True Color	90	98	11650	91%	91%	90%	88%

Luminous flux tolerance: ±10%
Custom order CCT : 2700K,3500K




R70  150x150

Input Voltage : 220-240V~ 50/60Hz




System watt	Lumen category	CCT	CRI (Ra)	Light Color	TM-30-15		luminous flux	Light output efficiency		
					R _f	R _g		14°	24°	36°
28W	2000 lm	3000K	95	Crisp Color	91	103	2250	91%	90%	88%
28W	3000 lm	3000K	90	True Color	92	99	2750	91%	90%	88%
36W		3000K	95	Crisp Color	91	103	2900	91%	90%	88%
42W		3000K	95	Crisp Color	91	103	3400	91%	90%	88%
28W		4000K	90	True Color	90	98	3000	91%	90%	88%
36W	4000 lm	3000K	90	True Color	92	99	3550	91%	90%	88%
42W		3000K	90	True Color	92	99	4150	91%	90%	88%
36W		4000K	90	True Color	90	98	3900	91%	90%	88%
42W		4000K	90	True Color	90	98	4550	91%	90%	88%

Luminous flux tolerance: ±10%
Custom order CCT : 2700K,3500K

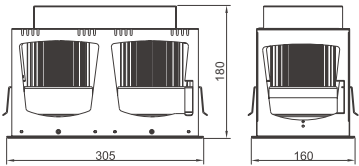

R71 295x150

Input Voltage : 220-240V~ 50/60Hz



System watt	Lumen category	CCT	CRI (Ra)	Light Color	TM-30-15		luminous flux	Light output efficiency		
					R _f	R _g		14°	24°	36°
2x28W	5000lm	3000K	95	Crisp Color	91	103	4550	91%	90%	88%
2x28W		3000K	90	True Color	92	99	5550	91%	90%	88%
2x36W	6000lm	3000K	95	Crisp Color	91	103	5850	91%	90%	88%
2x28W		4000K	90	True Color	90	98	6050	91%	90%	88%
2x42W	8000lm	3000K	95	Crisp Color	91	103	6800	91%	90%	88%
2x36W		3000K	90	True Color	92	99	7150	91%	90%	88%
2x42W		3000K	90	True Color	92	99	8300	91%	90%	88%
2x36W		4000K	90	True Color	90	98	7800	91%	90%	88%
2x42W		4000K	90	True Color	90	98	9050	91%	90%	88%

Luminous flux tolerance: ±10%
Custom order CCT : 2700K,3500K



Led Surface mounted Light & Pendant Light

EN

The perfect design and the innovative techniques of GRACION appear also in our pendant lamps. GRACION pendant lamps have been developed and manufactured functional and are following the most modern technologies - like all GRACION products. GRACION pendant lamps can be mounted directly to the ceiling or via tracksystems, very flexible, very GRACION.

DE


Perfekt und Gestaltung, Innovation und Design zeichnen GRACION Pendelleuchten aus. GRACION Pendelleuchten sind funktionell und nach neuestem Entwicklungsstand entwickelt und gefertigt worden. Wie alle GRACION Produkte. GRACION Pendelleuchten können direkt an der Decke oder über Stromschienen befestigt werden, eben vielseitig, eben GRACION.

ES

Las lámparas colgantes de GRACION ofrecen un diseño perfecto, innovador y moderno. Han sido desarrolladas y fabricadas teniendo en cuenta la funcionalidad y finalidad, como todos los productos de GRACION. Las lámparas colgantes se pueden montar directamente en el techo o en carril trifásico Global.




Input Voltage : 220-240V~ 50/60Hz



System watt	Lumen category	CCT	CRI (Ra)	Light Color	TM-30-15		luminous flux	Light output efficiency
					R _f	R _g		55°
28W	3000 lm	3000K	80	Ordinary Color	83	95	3300	80%
36W	4000 lm	3000K	80	Ordinary Color	83	95	4200	80%
28W		4000K	80	Ordinary Color	83	95	3550	80%
42W	5000 lm	3000K	80	Ordinary Color	83	95	4900	80%
36W		4000K	80	Ordinary Color	83	95	4550	80%
42W		4000K	80	Ordinary Color	83	95	5300	80%
50W	6000 lm	3000K	80	Ordinary Color	83	95	5600	80%
50W		4000K	80	Ordinary Color	83	95	6050	80%
42W	Food	FM	—	Fresh Meat Color	—	—	2650	80%
42W		FT	—	Fruit & Vegetable Color	—	—	4550	80%
42W		B	—	Bakery Color	—	—	3950	80%


Luminous flux tolerance: ±10%
Custom order CCT : 2700K,3500K

Input Voltage : 220-240V~ 50/60Hz




System watt	Lumen category	CCT	CRI (Ra)	Light Color	TM-30-15		luminous flux	Light output efficiency
					R _f	R _g		55°
28W	3000 lm	3000K	80	Ordinary Color	83	95	3300	80%
36W	4000 lm	3000K	80	Ordinary Color	83	95	4200	80%
28W		4000K	80	Ordinary Color	83	95	3550	80%
42W	5000 lm	3000K	80	Ordinary Color	83	95	4900	80%
36W		4000K	80	Ordinary Color	83	95	4550	80%
42W		4000K	80	Ordinary Color	83	95	5300	80%
50W	6000 lm	3000K	80	Ordinary Color	83	95	5600	80%
50W		4000K	80	Ordinary Color	83	95	6050	80%
42W	Food	FM	—	Fresh Meat Color	—	—	2650	80%
42W		FT	—	Fruit & Vegetable Color	—	—	4550	80%
42W		B	—	Bakery Color	—	—	3950	80%

Luminous flux tolerance: ±10%
Custom order CCT : 2700K,3500K



P03


Input Voltage : 220-240V~ 50/60Hz



System watt	Lumen category	CCT	CRI (Ra)	Light Color	TM-30-15		luminous flux	Light output efficiency	
					R _f	R _g		55°	60°
42W	4000 lm	3000K	90	True Color	92	99	4150	80%	80%
42W	5000 lm	4000K	90	True Color	90	98	4550	80%	80%
56W		3000K	90	True Color	92	99	5550	80%	80%
56W	6000 lm	4000K	90	True Color	90	98	6050	80%	80%
42W	Food	FM	—	Fresh Meat Color	—	—	2650	80%	80%
42W		FT	—	Fruit & Vegetable Color	—	—	4550	80%	80%
42W		B	—	Bakery Color	—	—	3950	80%	80%
56W		FM	—	Fresh Meat Color	—	—	3550	80%	80%
56W		FT	—	Fruit & Vegetable Color	—	—	6050	80%	80%
56W		B	—	Bakery Color	—	—	5300	80%	80%


Luminous flux tolerance: ±10%
Custom order CCT : 2700K,3500K





P05

Input Voltage : 220-240V~ 50/60Hz






System watt	Lumen category	CCT	CRI (Ra)	Light Color	TM-30-15		luminous flux	Light output efficiency
					R _f	R _g		
42W	5000 lm	3000K	80	Ordinary Color	83	95	4900	88%
42W		4000K	80	Ordinary Color	83	95	5300	88%
42W	Food	FM	—	Fresh Meat Color	—	—	2650	88%
42W		FT	—	Fruit & Vegetable Color	—	—	4550	88%
42W		B	—	Bakery Color	—	—	3950	88%





























Luminous flux tolerance: ±10%
Custom order CCT : 2700K,3500K

LIGHT
PROJECT
FOR
OUR CLIENT
→



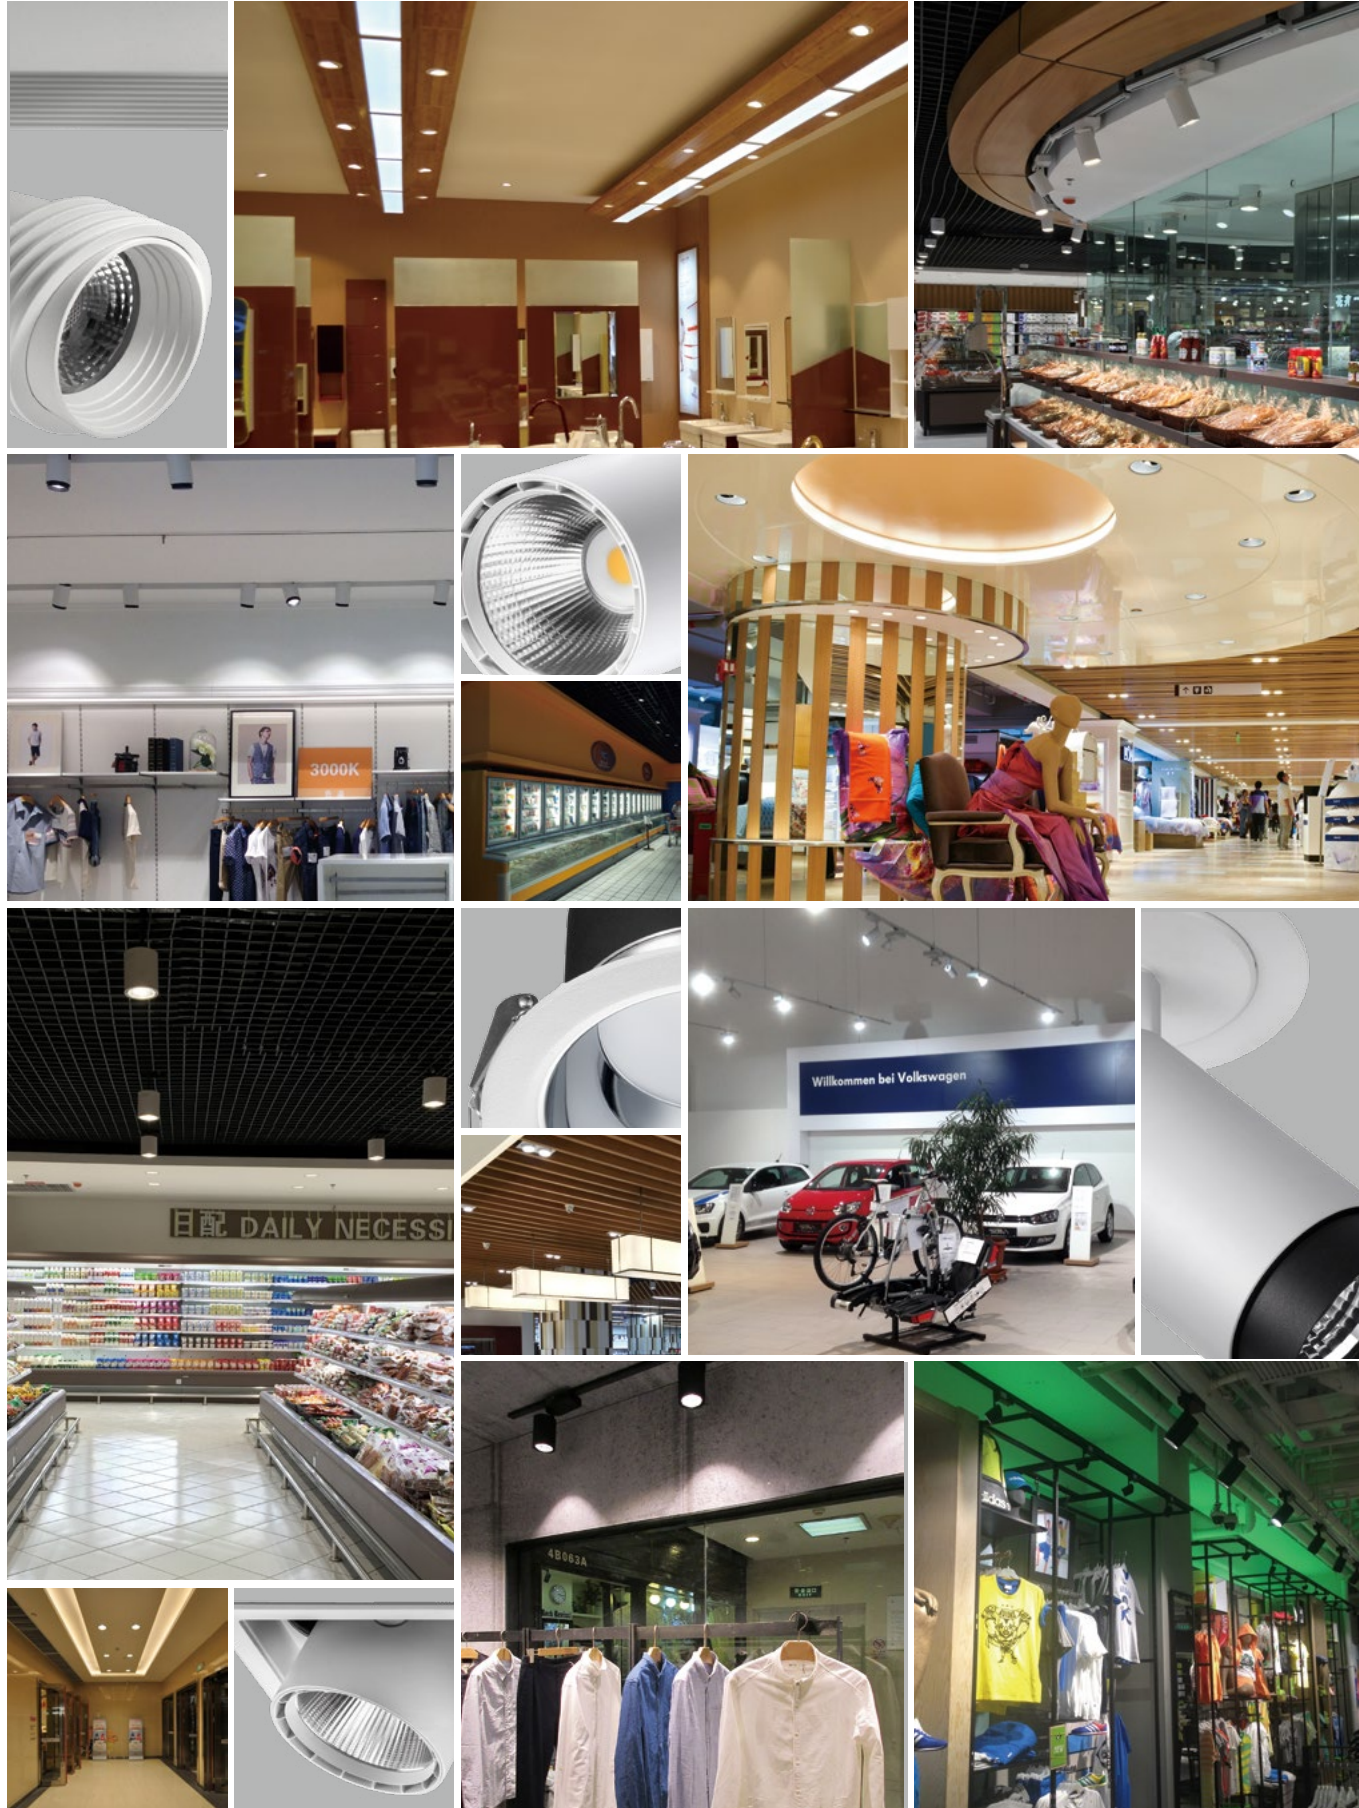

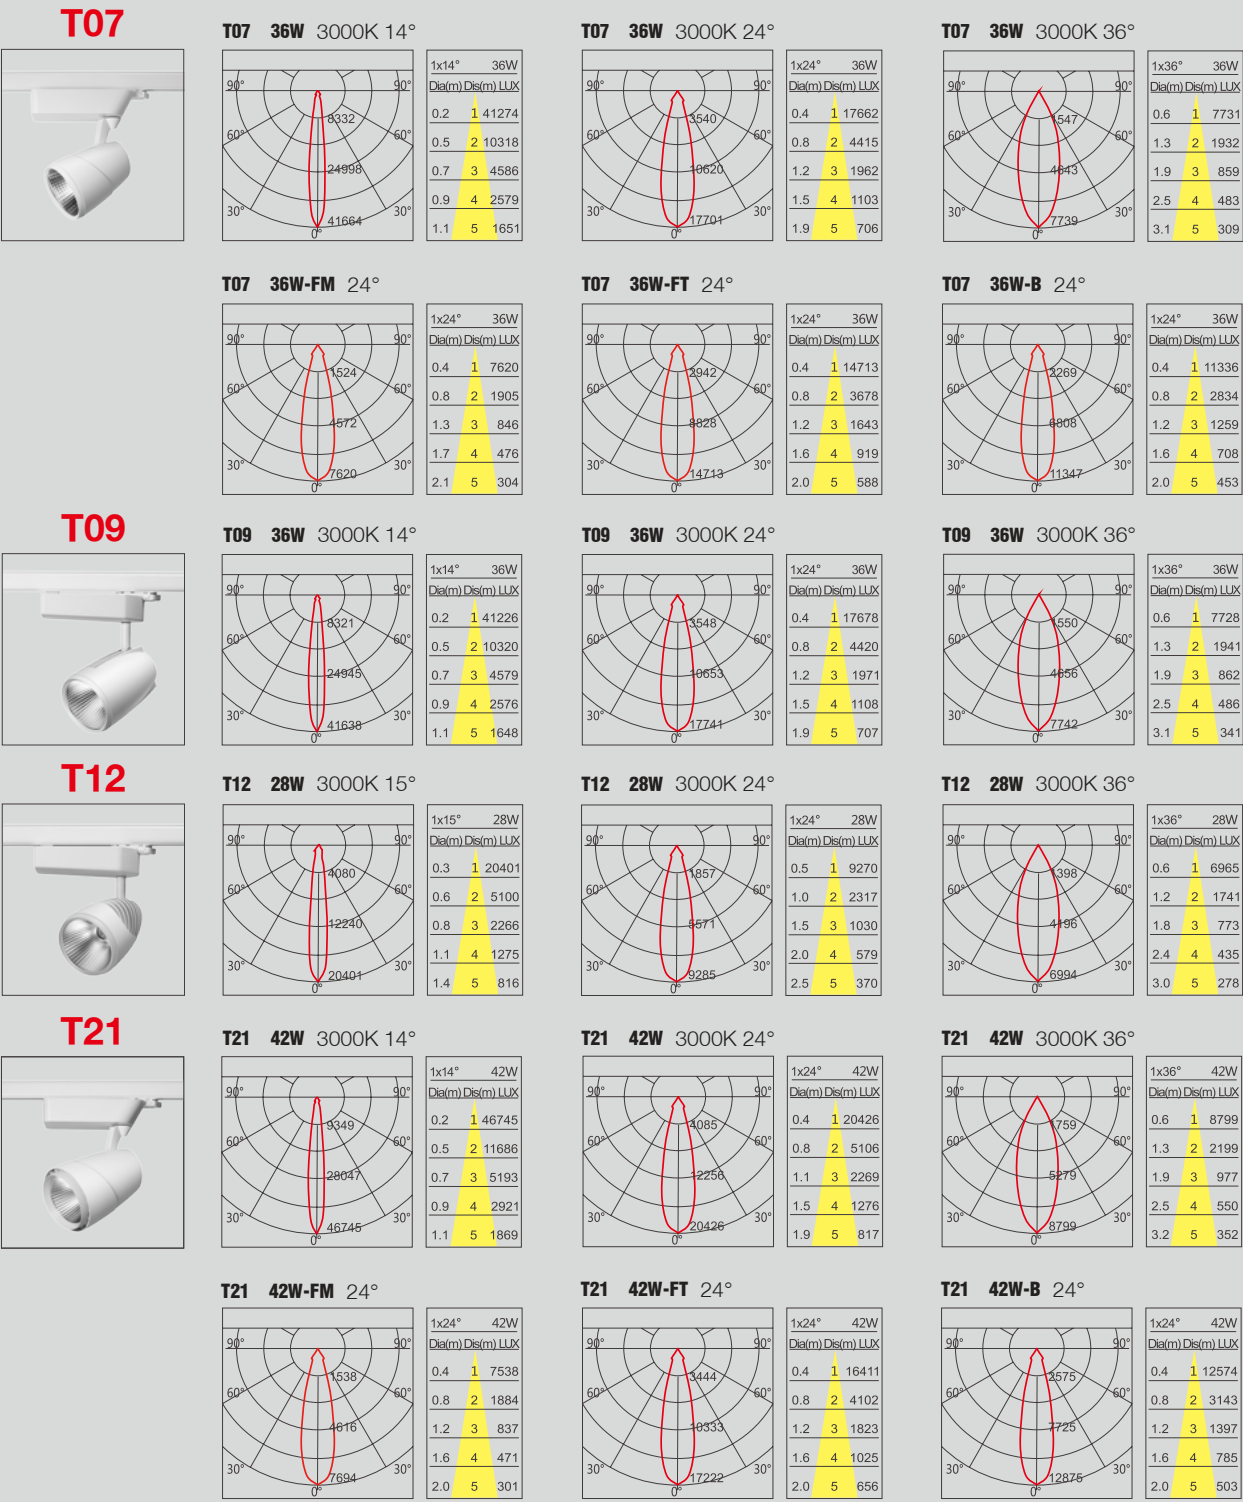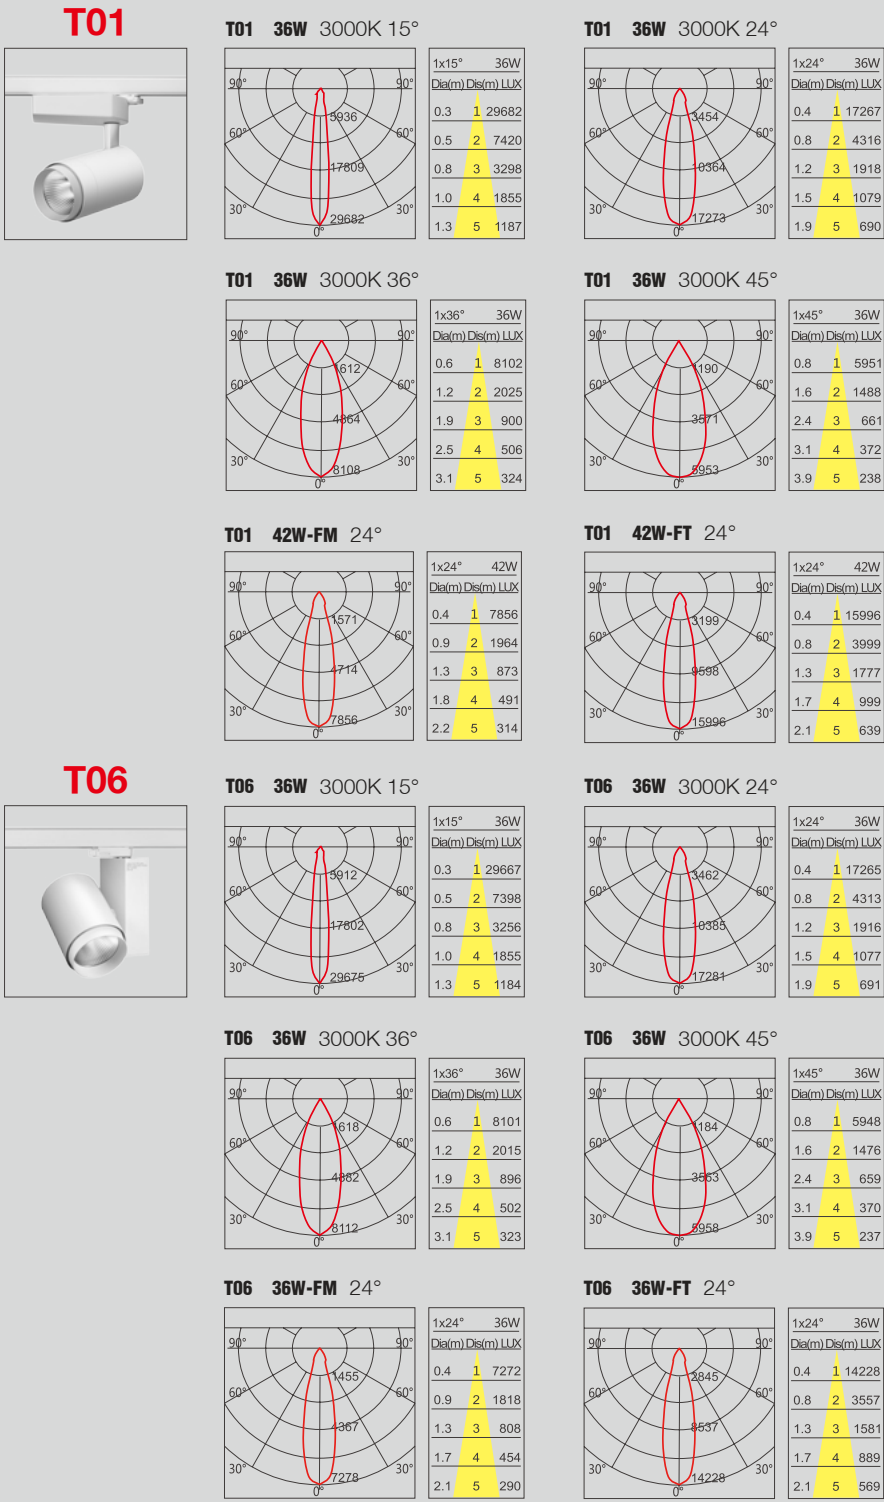





R22



R22 3x8W 4000K 24°

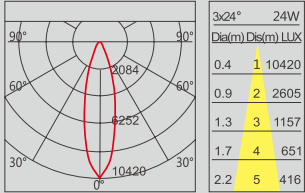


R22 3x8W 4000K 36°




R30




R30 42W 4000K 15°

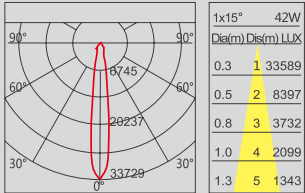


R30 42W 4000K 24°




R30 42W 4000K 36°




R30 42W 4000K 45°




R30 42W-FM 24°

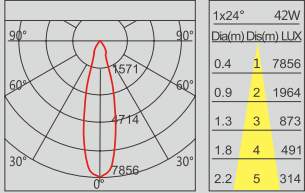

R30 42W-FT 24°




R30 42W-B 24°

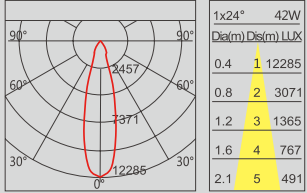

R32




R32 10W 4000K 65°

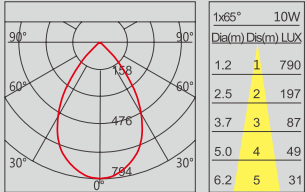

R33




R33 14W 4000K 65°

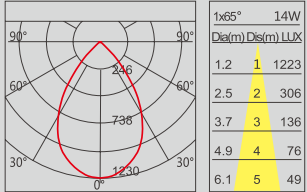

R34




R34 20W 4000K 65°

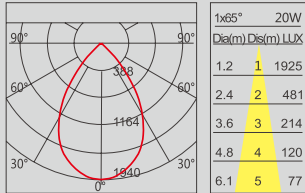

R35




R35 26W 4000K 65°




R41




R41 36W 4000K 15°

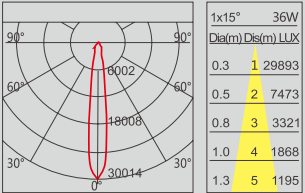


R41 36W 4000K 24°

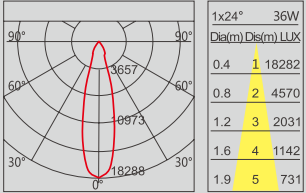

R41 36W 4000K 36°

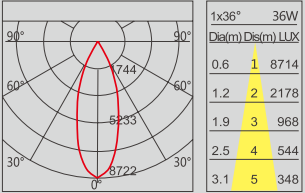


R41 36W 4000K 45°

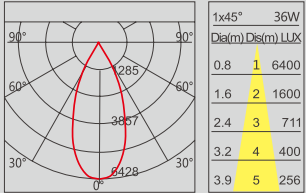


R42




R42 36W 4000K 15°

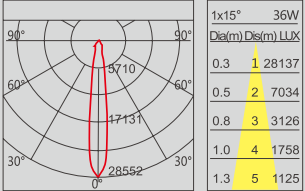


R42 36W 4000K 24°

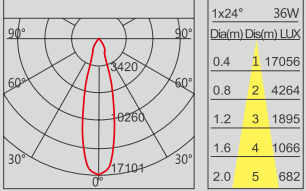

R42 36W 4000K 36°

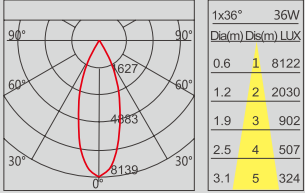


R42 36W 4000K 45°

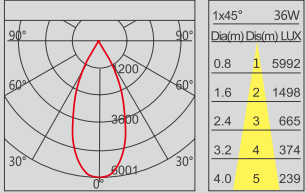


R44




R44 36W 4000K 15°

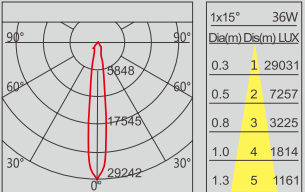


R44 36W 4000K 24°

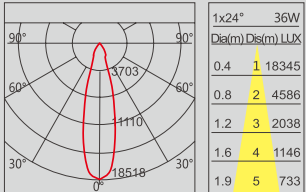


R44 36W 4000K 36°




R44 36W 4000K 45°




R44 36W-FM 24°







R44 36W-FT 24°







R44 36W-B 24°







R45







R46








R47





R48








R49



R50




R52




R53




R53 2x36W 4000K 15°

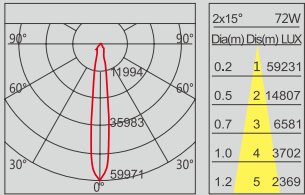


R53 2x36W 4000K 24°

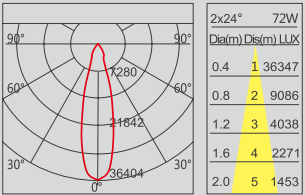

R53 2x36W 4000K 36°

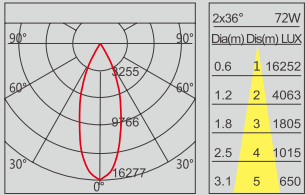


R53 2x36W 4000K 45°

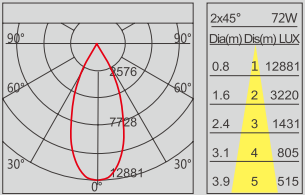


R56




R56 36W 4000K 15°

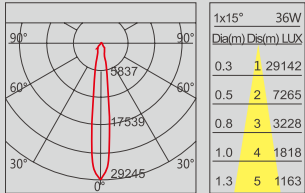


R56 36W 4000K 24°

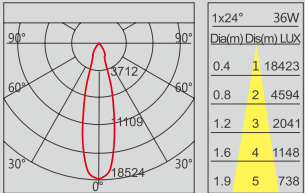


R56 36W 4000K 36°




R56 36W 4000K 45°




R56 36W-FM 24°

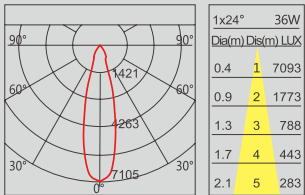

R56 36W-FT 24°

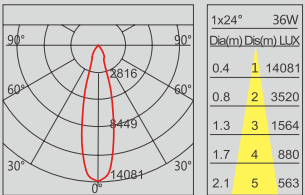


R56 36W-B 24°

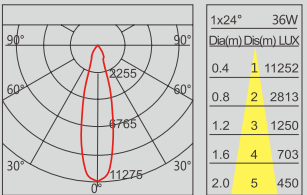


R70




R70 36W 4000K 14°



R70 36W 4000K 24°




R70 36W 4000K 36°




R71




R71 2x36W 4000K 14°

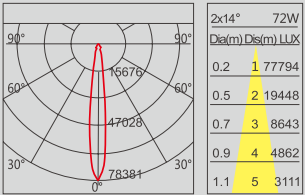

R71 2x36W 4000K 24°

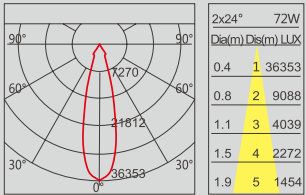


R71 2x36W 4000K 36°

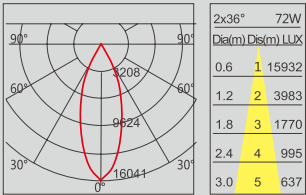

R82




R82 26W 4000K 65°

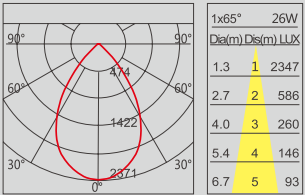


R83




R83 26W 4000K 65°

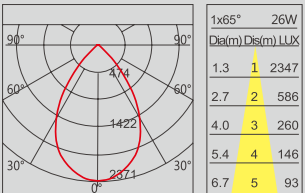


R85




R85 36W 4000K 15°

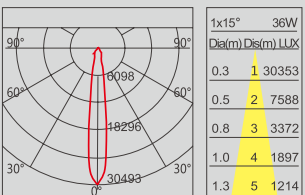


R85 36W 4000K 24°

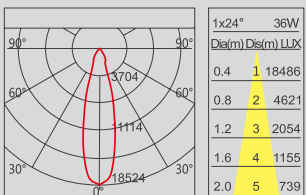


R85 36W 4000K 36°

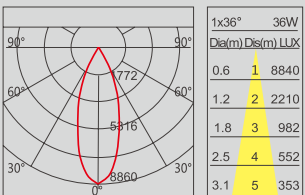


R85 36W 4000K 45°

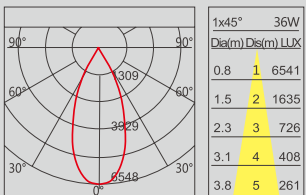


R86




R86 2x36W 4000K 15°

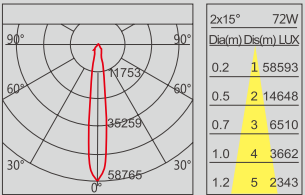


R86 2x36W 4000K 24°








R86 2x36W 4000K 36°







R86 2x36W 4000K 45°

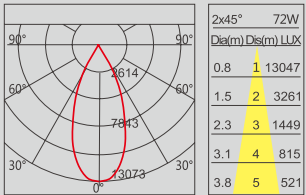





R87







C04







P03



P05



P07



COLOR TEMPERATURE



EN

SCENES	COLOUR TEMPERATURE
Blue sky	12-20000K
Sun-summer light	6500K
Sun-morning light and late afternon	4300K
Sun-dawn and sunset	2000K
Candle flame	1850-1900K

DE

SZENEN	COLOUR TEMPERATURE
Blauer Himmel	12-20000K
Sonnenlicht im Sommer	6500K
Morgen- und späte Nachmittagssonne	4300K
Sonnenaufgang und -untergang	2000K
Kerzenflamme	1850-1900K

ES

ESCENAS	TEMPERATURA DE COLOR
Azul cielo	12-20000K
Sol – luz de verano	6500K
Sol - luz de la mañana ya última hora de la tarde	4300K
Sol - al amanecer y al atardecer	2000K
Llama de vela	1850-1900K

SZENEN	COLOUR TEMPERATURE
Office	4000-5000K
Shopping area	3500-4000K
Sports wear	3000-4000K
Formal Clothes	2700-3000K
Hotel	2700-3000K

SZENEN	COLOUR TEMPERATURE
Büros	4000-5000K
Einkaufszonen	3500-4000K
Sportkleidung	3000-4000K
Formelle Kleidung	2700-3000K
Hotel	2700-3000K

ESCENAS	TEMPERATURA DE COLOR
Oficina	4000-5000K
Área de compras	3500-4000K
Ropa de deporte	3000-4000K
Ropa formal	2700-3000K
Hotel	2700-3000K

RENDERING INDEX



EN

Ra = 90 - 100	Excellent colour rendering properties
Ra = 80 - 90	Good colour rendering properties
Ra = 60 - 80	Moderate colour rendering properties
Ra < 60	Poor colour rendering properties

PLACE OF APPLICATION	COLOR REDNERING INDEX
Museum	CRI ≥ 95
High fashion,jewelry	CRI ≥ 90
Fresh food	CRI ≥ 90
Greneral goods	CRI ≥ 80
Public space of shopping space	CRI ≥ 80
Wearhouse,parking area	CRI ≥ 70

DE

Ra = 100 - 90	Sehr gute Farbwiedergabeeigenschaften
Ra = 90 - 80	Gute Farbwiedergabeeigenschaften
Ra = 80 - 70	Mäßige Farbwiedergabeeigenschaften
Ra < 70	Geringwertige Farbwiedergabeeigenschaften

EINSATZORT	FARBWIEDERGABEINDEX
Museum	CRI ≥ 95
Haute-Couture-Mode, Juwelen	CRI ≥ 90
Frische Nahrungsmittel	CRI ≥ 90
Allgemeine Güter	CRI ≥ 80
Öffentliche Räume in Einkaufsräumen	CRI ≥ 80
Parkplätze	CRI ≥ 70

ES

Ra = 100 - 90	Excelentes propiedades de reproducción cromática
Ra = 90 - 80	Muy buenas propiedades de reproducción cromática
Ra = 80 - 70	Buenas propiedades de reproducción cromática
Ra < 70	Deficientes propiedades de reproducción cromática

DÓNDE APLICAR	ÍNDICE DE REPRODUCCIÓN CROMÁTICA
Museo	CRI ≥ 95
Alta costura, joyas	CRI ≥ 90
Alimentación fresca	CRI ≥ 90
Mercancía	CRI ≥ 80
Espacio público de área de compras	CRI ≥ 80
Zona de aparcamiento	CRI ≥ 70

COLOR RENDITION

EN

GRACION uses the IES TM 30 – 15 system.

In 2015, The North American IES (Illuminating Engineering Society) has introduced the TM-30-15 system - a new IES method, to evaluate the color rendering of a light source. This method is in accordance with the CIE 13.3 method and offers some optimization. The range of test colors has been expanded from 8 to 99, and the colors were chosen based on their natural occurrences.

The new "reference spectrum similarity index" called Fidelity Index (later R_f), describes in principle the same properties as the Ra index, used in the past, but is specialized for more test colors. The range of the value of the index is 0-100. Ra and the new R_f cannot be interchanged.

In addition to the evaluation of the light source by the Fidelity Index of the TM-30 method, the "gamut" is also taken into account. This new value is called the Gamut Index (later R_g).

The new TM-30 method cannot replace sampling, but is able to provide additional and more accurate information about the color rendering quality of a light source.

Since its appearance in 2015, GRACION operates accordingly to IES TM - 30 - 15.

DE

GRACION produziert nach IES TM- 30 – 15.

Die nordamerikanische IES (Illuminating Engineering Society) hat 2015unter dem Namen TM-30-15 eine neue IES-Methode zur Bewertung der Farbwiedergabe von Lichtquellen vorgestellt. Hierzu hat man sich an der CIE 13.3-Methode orientiert, diese optimiert und die Palette der Testfarben von 8 auf 99 Farben ausgebaut.

Der neue »Referenz-Spektrums-Ähnlichkeits-Index« nennt sich Fidelity- Index, abgekürzt R_f, und beschreibt im Prinzip denselben Zusammenhang, wie der alte Ra, allerdings nun für mehr und bessere Testfarben. Zusätzlich zur Bewertung der Testlichtquelle, der Fidelity R_f, wird beimTM-30 Verfahren auch der »Farbumfang« berücksichtigt. Dieser drückt sich im Gamut-Index, abgekürzt R_g aus.

Die neue TM-30 Methode kann keine Bemusterung ersetzen, aber auf jeden Fall aussagekräftigere und detailliertere Informationen zur Farbwiedergabequalität von Lichtquellen geben.

GRACION arbeitet seit Einführung 2015 nach dem IES TM – 30 – 15.




ES

GRACION produce IES TM 30-15

IES norteamericana (Illuminating Engineering Society) ha llevado a cabo en 2015, bajo el nombre TM-30-15, un método nuevo de IES para evaluar una nueva reproducción del color de la fuente de luz. Para ello, se ha desarrollado y optimizado el método de CIE 13.3. La gama de colores de prueba ha sido ampliada de 8 a 99 colores, basándose en el origen de colores naturales.

El nuevo "índice de referencia de similitud de espectro" representado como índice de fidelity(R_f), es el sustituto del antiguo Ra, con más y mejores pruebas de colores. La "gama" varía ahora de 0-100. Además de la evaluación de la prueba de fuente de luz, junto con el índice de fidelity (R_f), el método TM-30 y la "gama", obtenemos el" índice de gama"(R_g). El método nuevo TM-30 ofrece y revela información más detallada sobre la calidad de reproducción del color de fuente de luz.

GRACION trabaja de acuerdo con IES TM – 30-15 desde la introducción de este método en 2015.

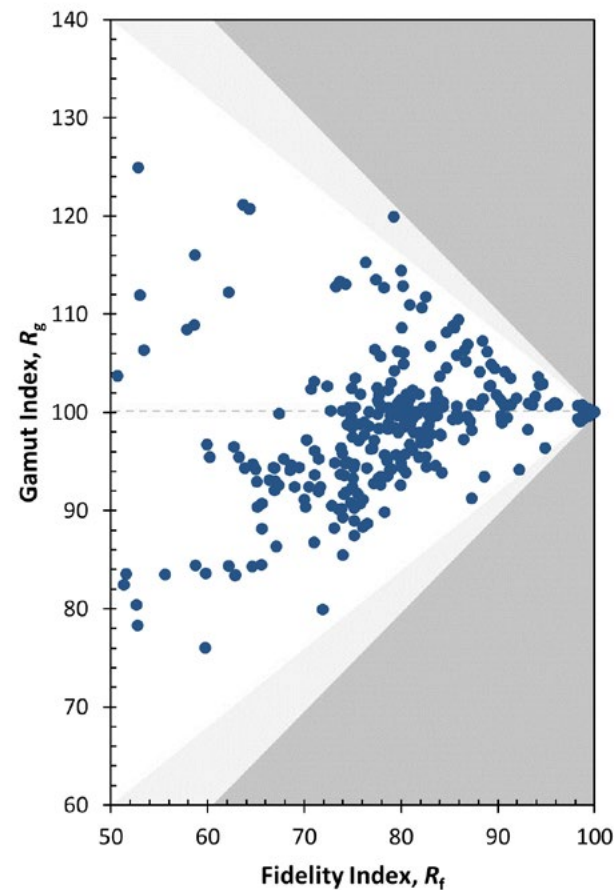

SPECIFIC LIGHT COLOR APPLICATIONS

EN


The product range is complex, fresh, healthy and sustainable. GRACION developments present your products in the best fitting light: stable and efficient. Simply fresh.

DE


Das Warenangebot wird komplexer, frisch, gesund und nachhaltig. GRACION Entwicklungen präsentieren Ihre Produkte im richtigen Licht, nachhaltig und effizient. Einfach frisch.

ES


La gama de productos es muy variada, fresca, saludable y sostenible. Desarrollamos productos que aportan la luz adecuada, sostenible y eficiente.

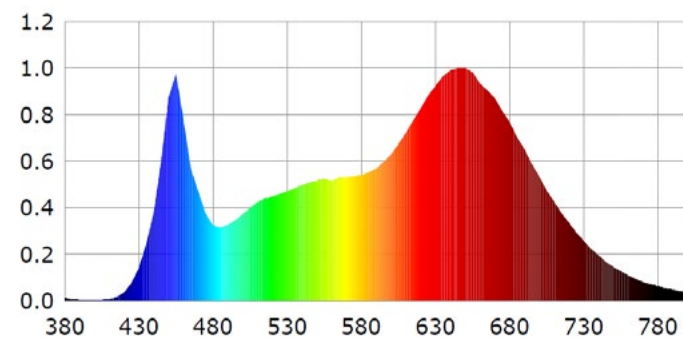


T27-28W Fresh Meat Color

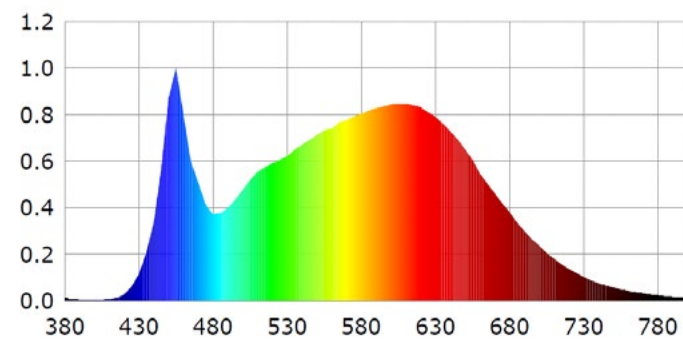

T27-28W Fruit & Vegetable Color

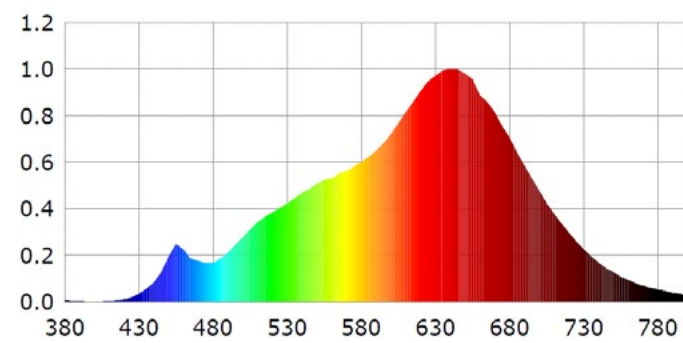

T27-28W Golden Color

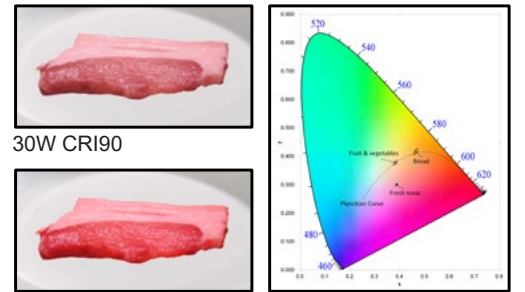

30W CR190

30W Fresh Meat Color




TRUE COLOR AND RICH COLOR

THE DIFFERENT LIGHTING METHODS


CRI

RA80 SERIES,TRUE COLOR SERIES and RICH COLOR SERIES contrast in the color rendering index test.

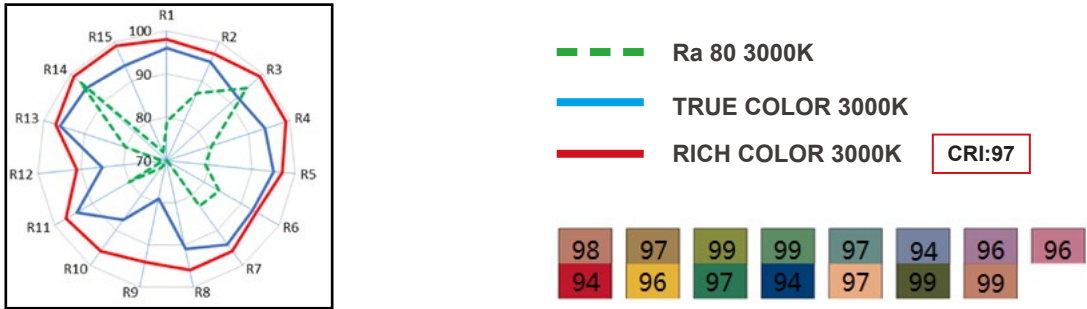


CQS

RA80 SERIES,TRUE COLOR SERIES and RICH COLOR SERIES contrast in the color quality scale test.

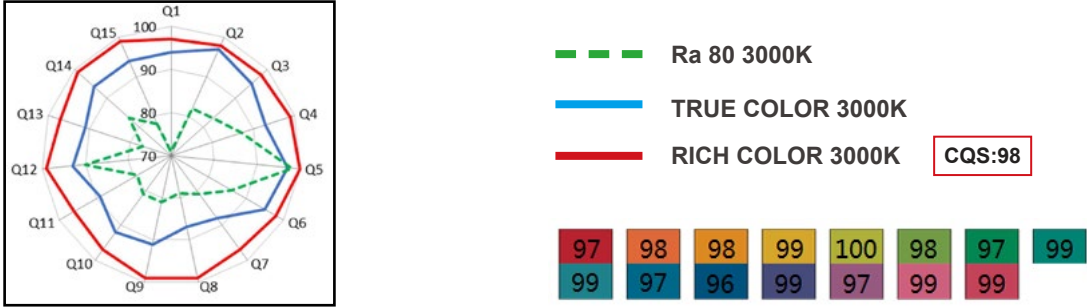


TM-30-15

RA80 SERIES,TRUE COLOR SERIES and RICH COLOR SERIES contrast in the TM-30-15 test.

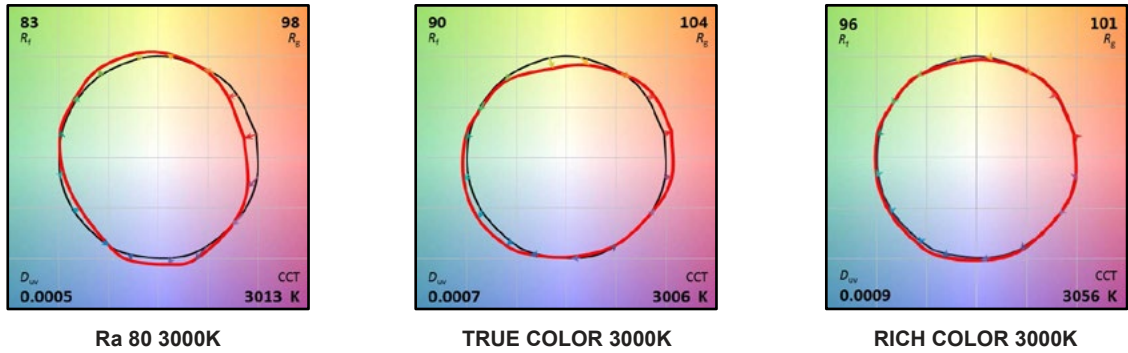

RICH COLOR SERIES has excellent color reproduction.


Direct Lighting

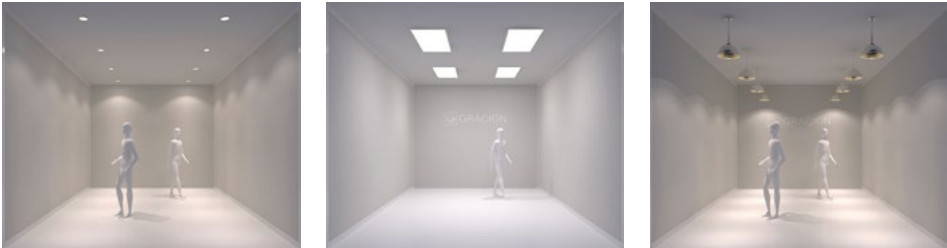


Indirect Lighting



Spotlighting

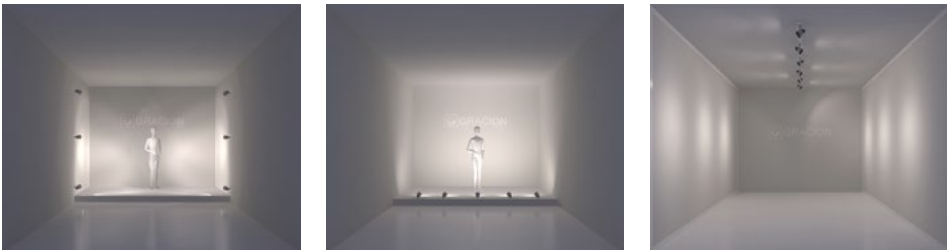


Wall Wash Lighting

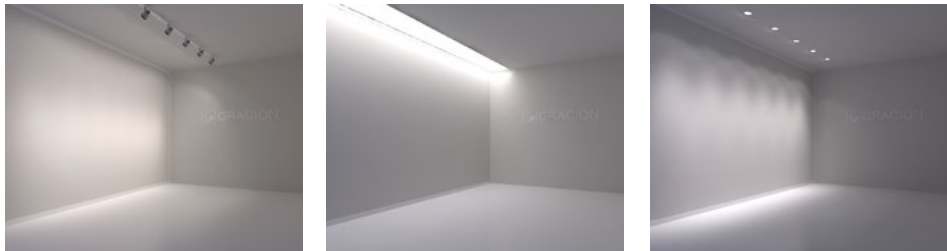

Transmission Light



Cabinet lighting

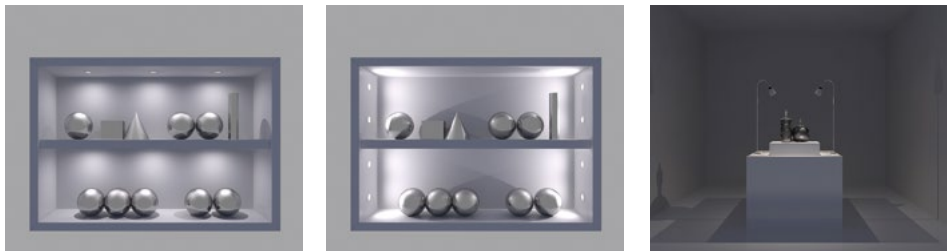



EN

The values shown on the previous figure represent the measured values to the copy deadline. Thanks to our technical advancements the system features can possess different frames. The general sale and delivery of GRACION Europe GmbH can be seen on www.gracion-europe.com.

DE

Bei den dargestellten Werten handelt es sich um die zum Redaktionsschluss gemessenen Werte. Durch technische Weiterentwicklungen können sich Systemmerkmale ändern. Es gelten die allgemeinen Verkaufs- und Lieferbedingungen der GRACION Europe GmbH, einzusehen auf www.gracion-europe.com.

ES

Los valores mostrados representan los valores medidos a la fecha límite de la copia. Las características del sistema están sujetas a los avances técnicos y pueden ser modificadas. Para la venta y entrega de mercancías de GRACION Europe GmbH, puede consultar en www.gracion-europe.com.

GRACION[®]

GUANGZHOU GRACION LIGHTING CO.,LTD

Address: South Xinghe 5th RD, 1st Industry Area of Taihe,
Baiyun District, Guangzhou, China

Zip code: 510540

E-mail: gracion@gracion.com.cn

www.gracion.com.cn

Gracion Europe GmbH

Kranhaus 1

Im Zollhafen 18

50678 Köln

Tel +49 (0)221 788 03-0

Fax +49 (0)221 788 03-388

www.gracion-europe.com

2LD.Live in Light!

Avda.de los Pirineos 7 Nave 1B

28703.San Sebastian de los Reyes.Madrid

Tel +34 91 112 34 67

Fax +34 91 179 32 14

www.2ld.es